



: 98863989

## KPC 300 A

The KPC 300 and 600 are designed mainly for automatically operated, permanent domestic applications for draining basements and garages, which are subject to flooding. Thanks to its compact, easy-to-handle design, it can also be used as a portable pump for emergencies such as lifting water from tanks or rivers, emptying swimming pools, fountains, excavations and underpasses. It is also ideal for gardening and hobbies in general. The level switch allows permanent installation and guarantees automatic pump operation.

:  
 :  
 : 0 .. 35 °C  
 : 998.2 / ³  
 :  
 : 10  
 :  
 : GFN2 ( ) GFN2  
 :  
 : Rp 1 1/4  
 : 7  
 :  
 : - P1: 350  
 : 50 Hz  
 : 1 x 220-240  
 : 1.5 A  
 : 8 /450  
 (IEC 34-5): IP68  
 (IEC 85): F  
 : 10  
 : SCHUKO  
 :  
 : 4.1  
 : 4.6  
 : 0.016 ³

1 KPC 300 A




: [98863989](#)

The KPC 300 and 600 are designed mainly for automatically operated, permanent domestic applications for draining basements and garages, which are subject to flooding. Thanks to its compact, easy-to-handle design, it can also be used as a portable pump for emergencies such as lifting water from tanks or rivers, emptying swimming pools, fountains, excavations and underpasses. It is also ideal for gardening and hobbies in general. The level switch allows permanent installation and guarantees automatic pump operation.

:  
 :  
 : 0 .. 35 °C  
 : 998.2 / 3  
 :  
 : 10  
 :  
 : GFN2  
 : ( ) GFN2  
 :  
 : Rp 1 1/4  
 : 7  
 :  
 : - P1: 350  
 : 50 Hz  
 : 1 x 220-240  
 : 1.5 A  
 : - : 8 /450  
 (IEC 34-5): IP68  
 (IEC 85): F  
 : 10  
 : SCHUKO  
 :  
 : 4.1  
 : 4.6  
 : 0.016 3





## 98863989 KPC 300 A 50

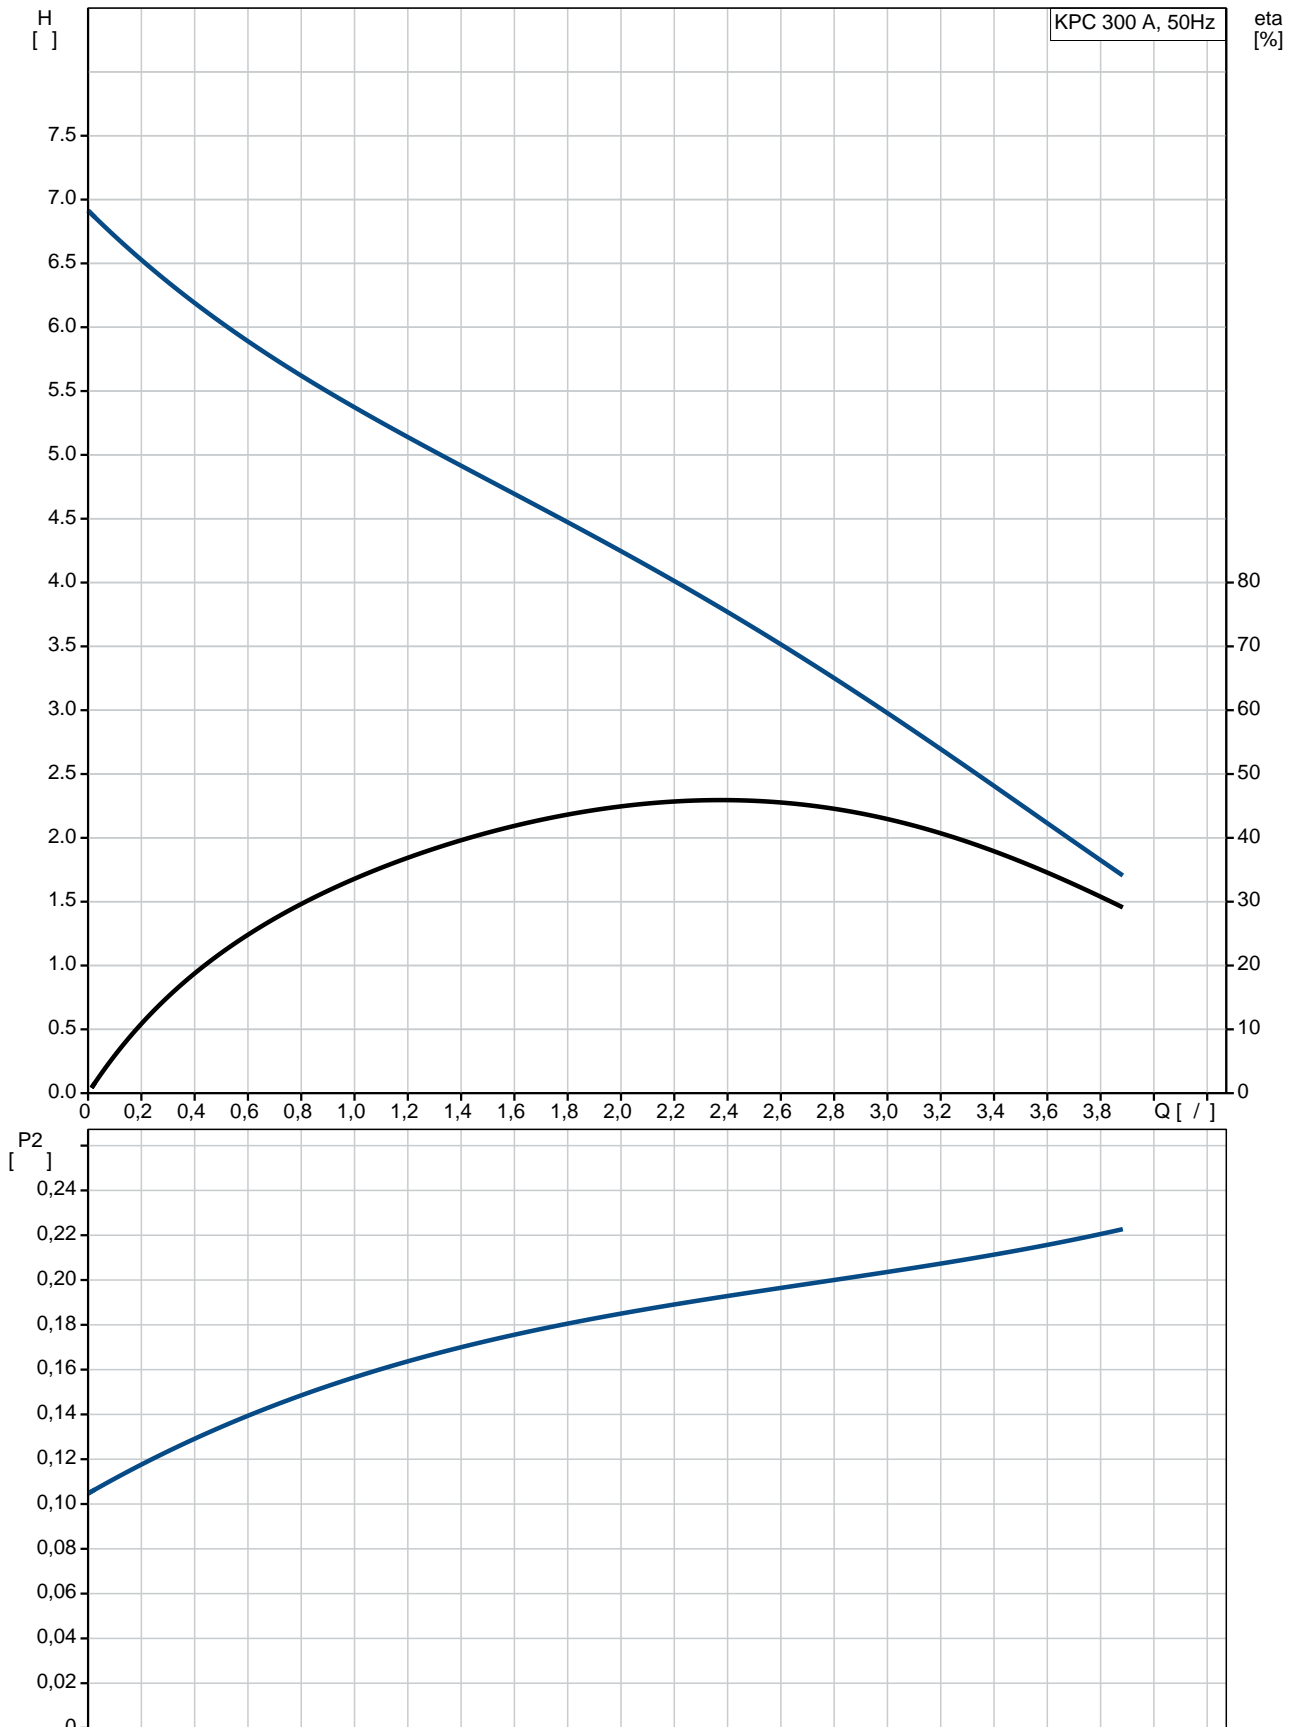


Email:

0971357799  
 sale@nasosplus.com.ua  
 09.02.2018


		KPC 300 A
		<a href="#">98863989</a>
EAN		5712602587920
Ma		3.61 /
		6.5
		10
		A
		GFN2
		GFN2 ( )
		Rp 1 1/4
		7
		0 .. 35 °C
		998.2 / <sup>3</sup>
	- P1:	350
		50 Hz
		1 x 220-240
		1.5 A
		8 /450
	(IEC 34-5):	IP68
	(IEC 85):	F
		10
		SCHUKO
		A/WITH
		4.1
		4.6
		0.016 <sup>3</sup>

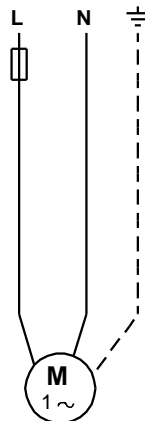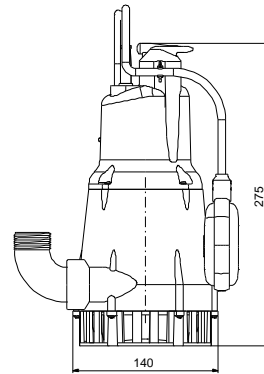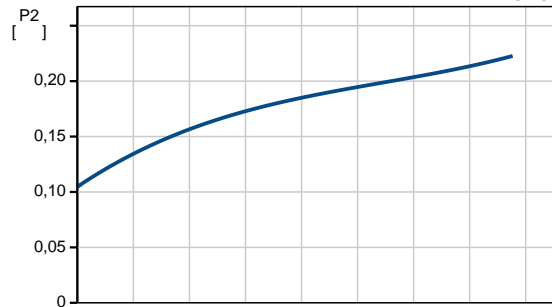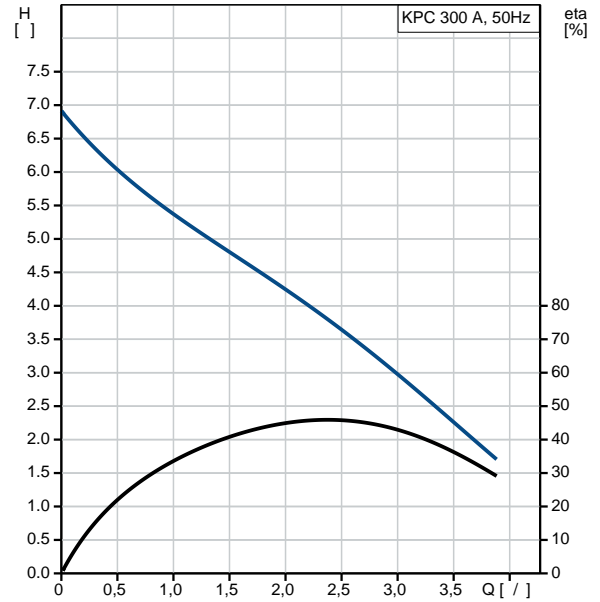

**98863989 KPC 300 A 50**

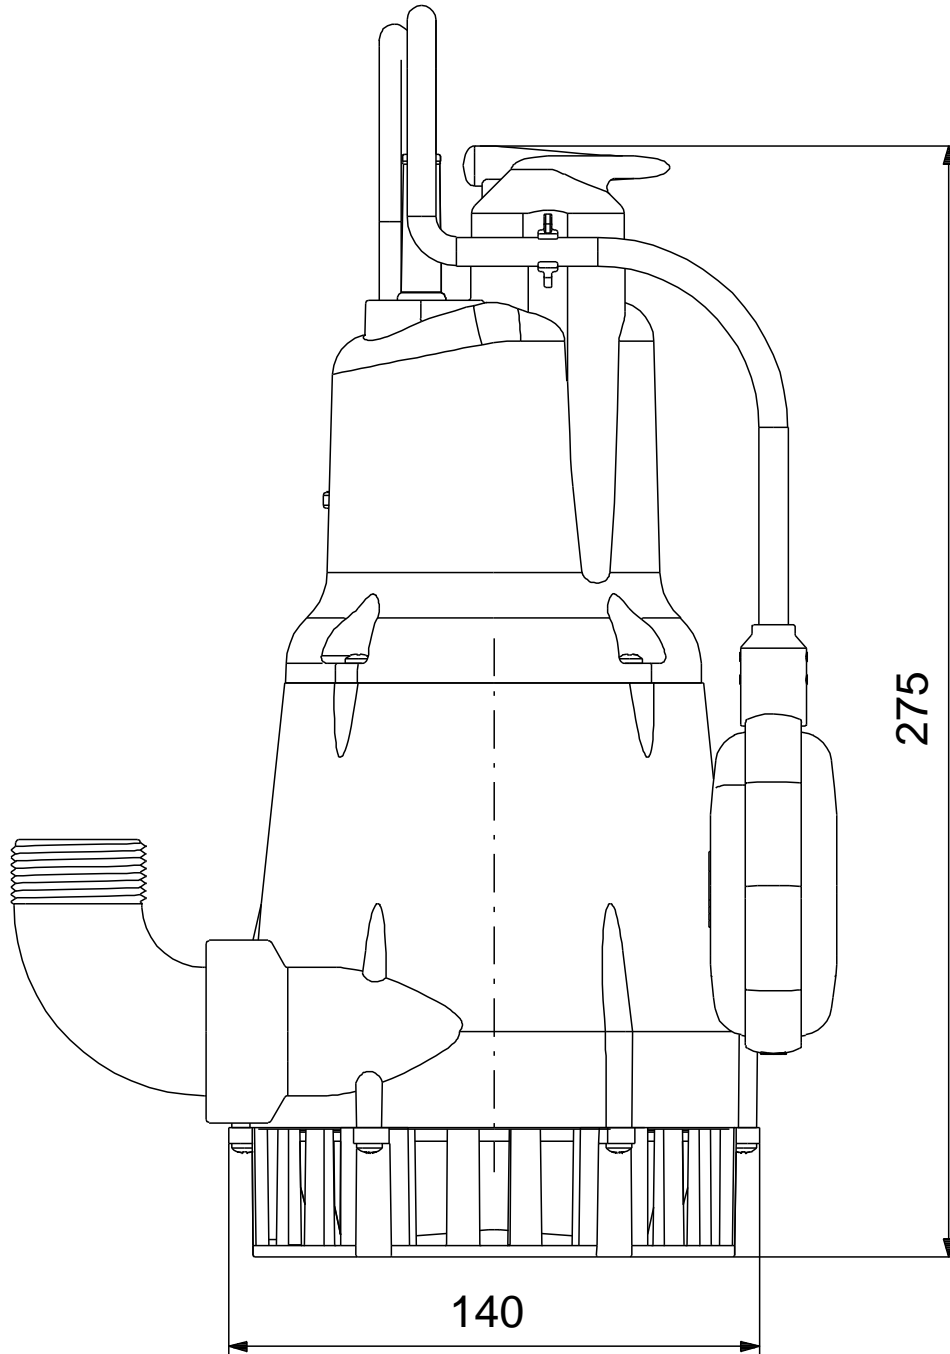

**98863989 KPC 300 A 50**

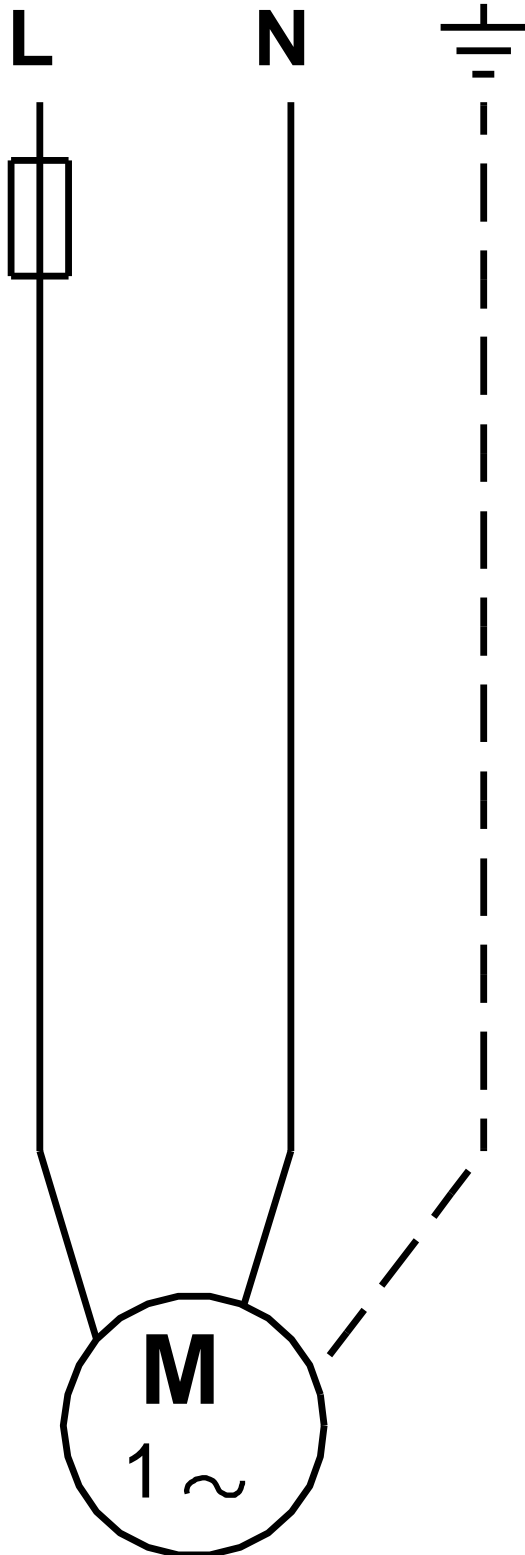

! [ ], .