


SERIE VRV

VRV



VRV

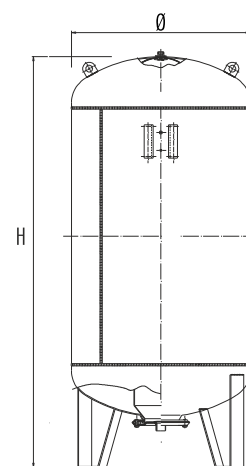

Vaso d'espansione con membrana intercambiabile per circuiti chiusi di riscaldamento.
Expansion vessel with replaceable membrane for closed heating systems.
Vase d'expansion à vessie remplaçable pour systèmes de chauffage.
Druckausdehnungsgefäß für Warmwasserheizungsanlagen und Kessel.

Temperatura d'esercizio
Working temperature
Température d'exercice
Betriebstemperatur

- 10° C
+ 100° C

Colore della verniciatura esterna
External finish color
Couleur de la peinture externe
Externe Beendenfarbe

RAL 3000

Membrana in gomma
Rubber membrane
Vessie en gomme
Gummimembrane

EPDM

Modello Model Modèle Model	Codice Code Code Code	Altezza Height Hauteur Höhe H (mm)	Diametro Diameter Diamètre Durchmesser Ø (mm)	Lunghezza Length Longeur Länge L (mm)	Pressione massima d'esercizio Maximun working pressure Pression maximale d'exercice Maximaler Betriebsdruck (bar)	Pressione di precarica standard Standard precharge pressure Pression de précharge standard Vordruck (bar)	Imballo Packing Emballage Verpackung (mm)	Attacco Connection Raccordement Anschluss (inch)
VRV750	AAXRH31R31GPO	1950	750	-	10	4	(Pz1) 800X800X2100	2"
VRV1000	AAYRH31R31GPO	2160	800	-	10	4	(Pz1) 800X800X2300	2"
VRV1500	AAZRH31R31GPO	2360	960	-	10	4	(Pz1) 1200X1200X2500	2"

Marcati CE secondo la Direttiva - CE marked according to Directive - Avec le marque CE selon la Directive - CE Kennzeichnung
PED 97/23/CE

Temperatura d'esercizio
Working temperature
Température d'exercice
Betriebstemperatur

- 10° C
+ 70° C

Colore della verniciatura esterna
External finish color
Couleur de la peinture externe
Externe Beendenfarbe

RAL 3000

Membrana in gomma
Rubber membrane
Vessie en gomme
Gummimembrane

BUTYL

Modello Model Modèle Model	Codice Code Code Code	Altezza Height Hauteur Höhe H (mm)	Diametro Diameter Diamètre Durchmesser Ø (mm)	Lunghezza Length Longeur Länge L (mm)	Pressione massima d'esercizio Maximun working pressure Pression maximale d'exercice Maximaler Betriebsdruck (bar)	Pressione di precarica standard Standard precharge pressure Pression de précharge standard Vordruck (bar)	Imballo Packing Emballage Verpackung (mm)	Attacco Connection Raccordement Anschluss (inch)
VRV2000	AAARH32R32GPO	2555	1100	-	10	4	(Pz1) 1200X1200X2700	2"
VRV3000	AABRH32R32GPO	2790	1200	-	10	4	(Pz1) 1200X2800X1350	DN65
VRV4000	AA4RH32R62QPO	3200	1450	-	10	4	(Pz1) 1580X3200X1450	DN80
VRV5000	AA5RH32R72QPO	3645	1450	-	10	4	(Pz1) 1600X3650X1450	DN80
VRV10000	AA1RH32R82QPO	5750	1600	-	10	4	(Pz1) 1750X5750X1600	DN80

Marcati CE secondo la Direttiva - CE marked according to Directive - Avec le marque CE selon la Directive - CE Kennzeichnung
PED 97/23/CE