

1 UPS 25-100 180



: 95906480

3-

*
*
*
*
*
*

, PES/PP.

1-

: -25 .. 110 °C
: 60 °C
: 983.2 / 3

TF : 110
: CE

EN-JL1030
ASTM 30 B
, PES/PP

.T : - 80 0C: 40 °C

: 10
: G 1 1/2
: PN 10
: 180


C : 9.5
: 1: 280
: 2: 340

: 345

: 50 Hz
: 1 x 230 V
1: 1.3 A
2: 1.5 A
3: 1.52 A
- : 9.5
(IEC 34-5): X4D
(IEC 85): H

:
:
:
:
: 6.3
: 6.8
: 0.012³

95906480 UPS 25-100 180 50

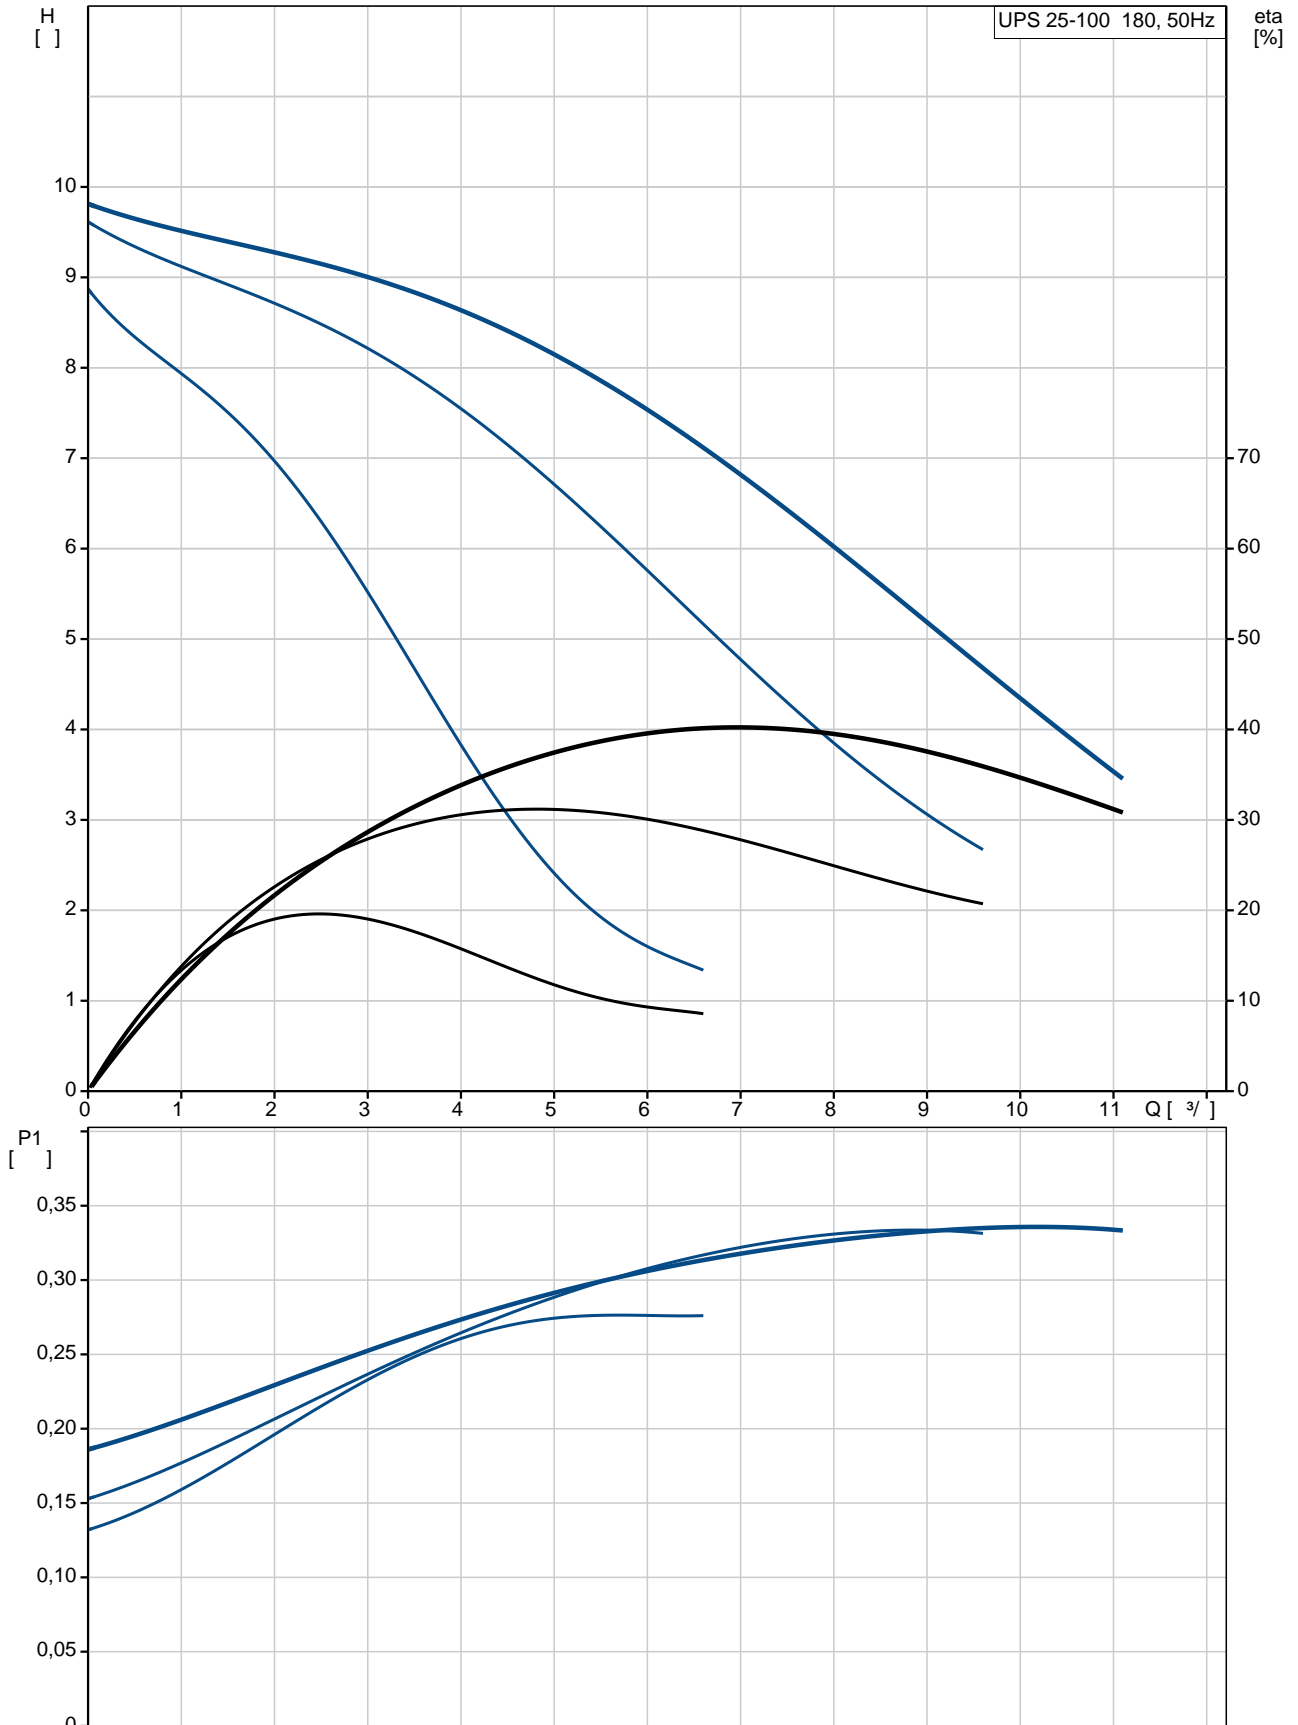

		UPS 25-100 180
		95906480
EAN		5700311099766
		3
TF		100
		110
		CE
		EN-JL1030
		ASTM 30 B
		, PES/PP
80 OC:	T	40 °C
		10
		G 1 1/2
		PN 10
		180
		-25 .. 110 °C
		60 °C
		983.2 / ³
C		9.5
	1:	280
	2:	340
		345
		50 Hz
		1 x 230 V
	1:	1.3 A
	2:	1.5 A
	3:	1.52 A
		9.5
	(IEC 34-5):	X4D
	(IEC 85):	H
		CONTACT
		9H
		6.3
		6.8
		0.012 ³

