

1 UPS 25-60 130



: 96281476

, PES/PP.

1-

: 2.. 110 °C
: 60 °C
983.2 / 3

TF : 110
: VDE

EN-JL1030
ASTM 30 B
, PES/PP

.T : - 80 0C: 40 °C

10
G 1 1/2
PN 10
130

C : 2.5

1: 50

2: 60

: 70

: 50 Hz

: 1 x 230 V

1: 0.22 A

2: 0.27 A

3: 0.3 A

- : 2.5

(IEC 34-5): IP44

(IEC 85): F

:

:

:


:

2.4

2.6

0.004 ³

96281476 UPS 25-60 130 50

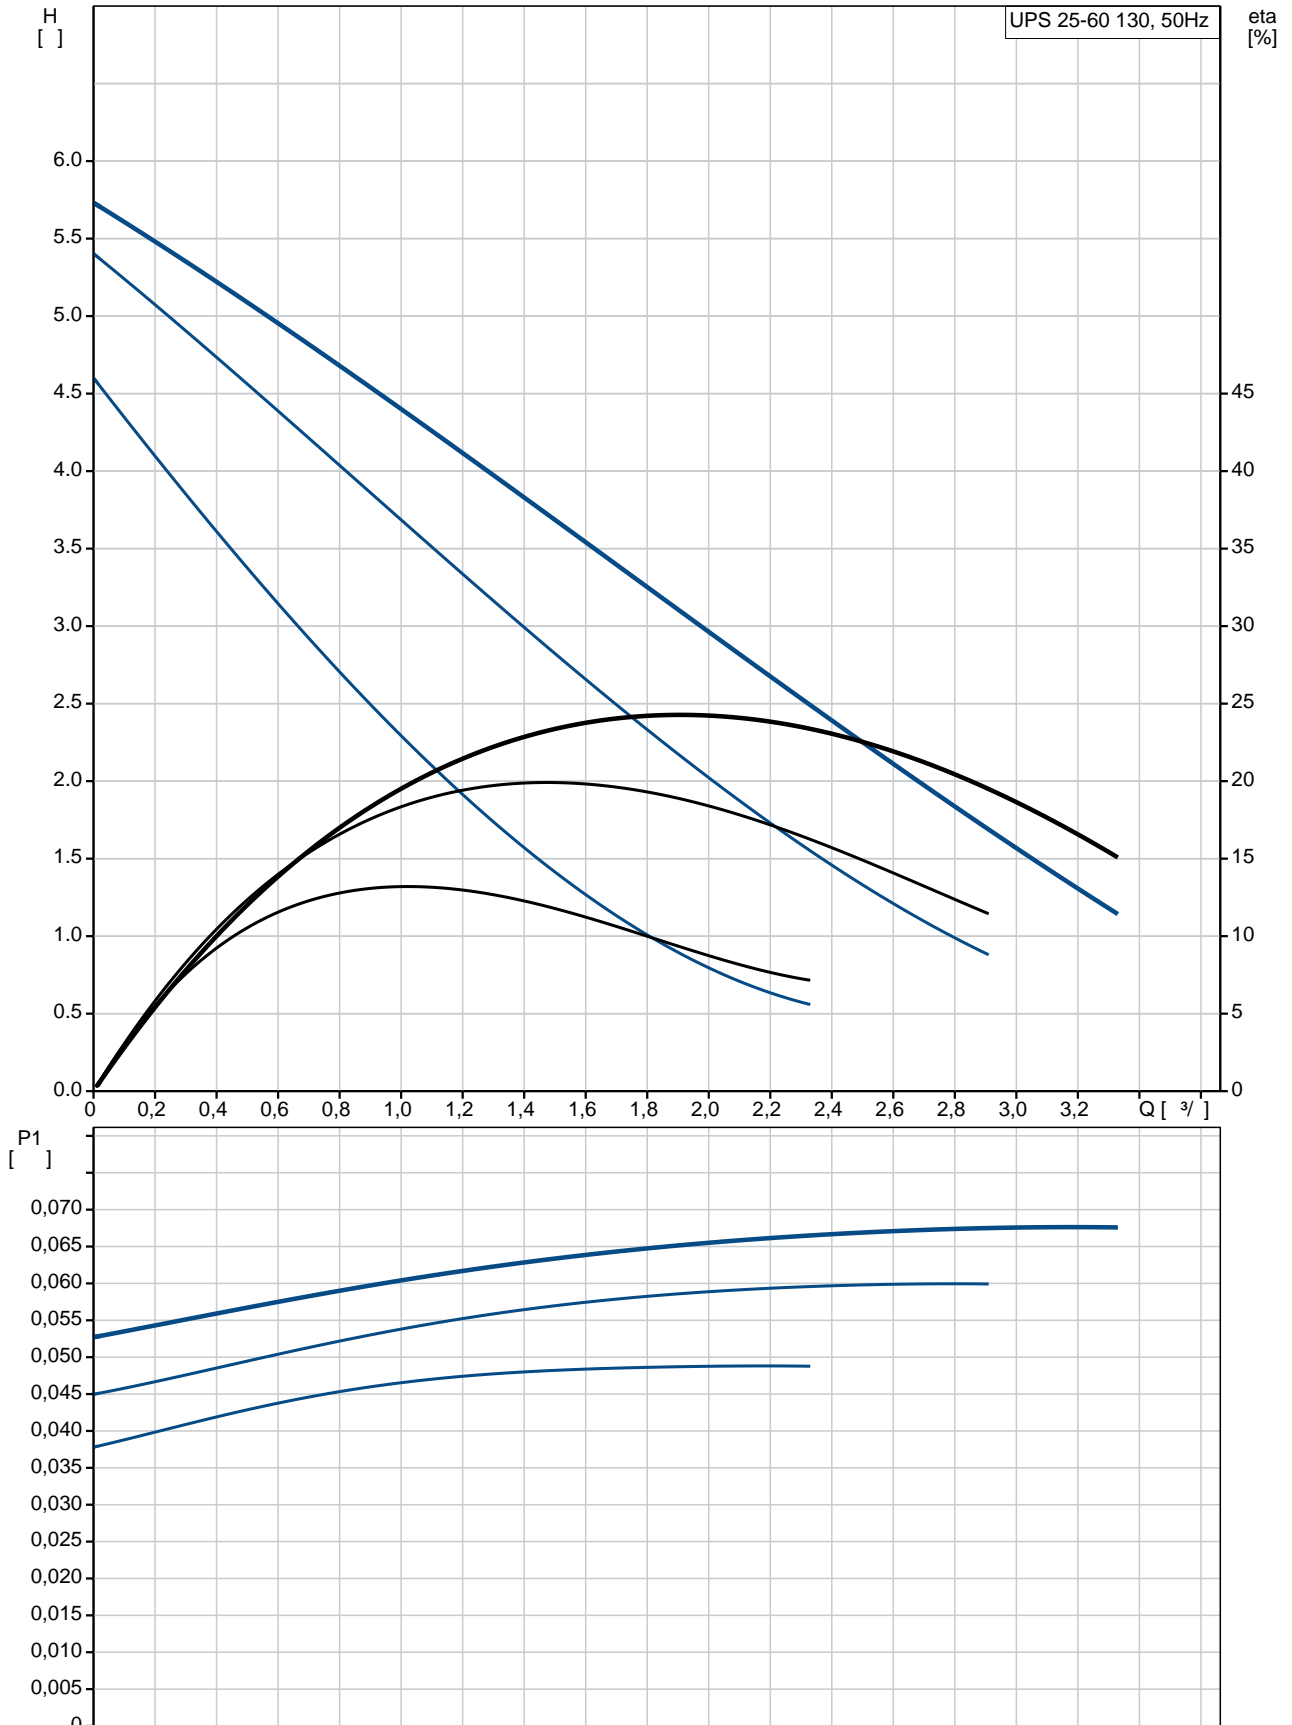

UPS 25-60 130	96281476
EAN	5700830383186
TF	3
	60
	110
	VDE
	EN-JL1030
	ASTM 30 B
	, PES/PP
T	40 °C
80 OC:	
	10
	G 1 1/2
	PN 10
	130
	2 .. 110 °C
	60 °C
	983.2 / ³
C	2.5
1:	50
2:	60
	70
	50 Hz
	1 x 230 V
1:	0.22 A
2:	0.27 A
3:	0.3 A
	2.5
(IEC 34-5):	IP44
(IEC 85):	F
	9H
	2.4
	2.6
	0.004 ³

