

1 UPS 32-40 180



: 96281389

, PES/PP.

1-

: 2.. 110 °C
: 60 °C
983.2 / 3

TF : 110
: EAC

EN-JL1030
ASTM 30 B
, PES/PP

.T : - 80 0C: 40 °C

10
G 2
PN 10
180

C : 1.5

1: 25

2: 35

: 45

: 50 Hz

: 1 x 230 V

1: 0.12 A

2: 0.16 A

3: 0.2 A

- : 1.5

(IEC 34-5): IP44


(IEC 85): F

: 2.6

: 2.8

: 0.004 ³

96281389 UPS 32-40 180 50

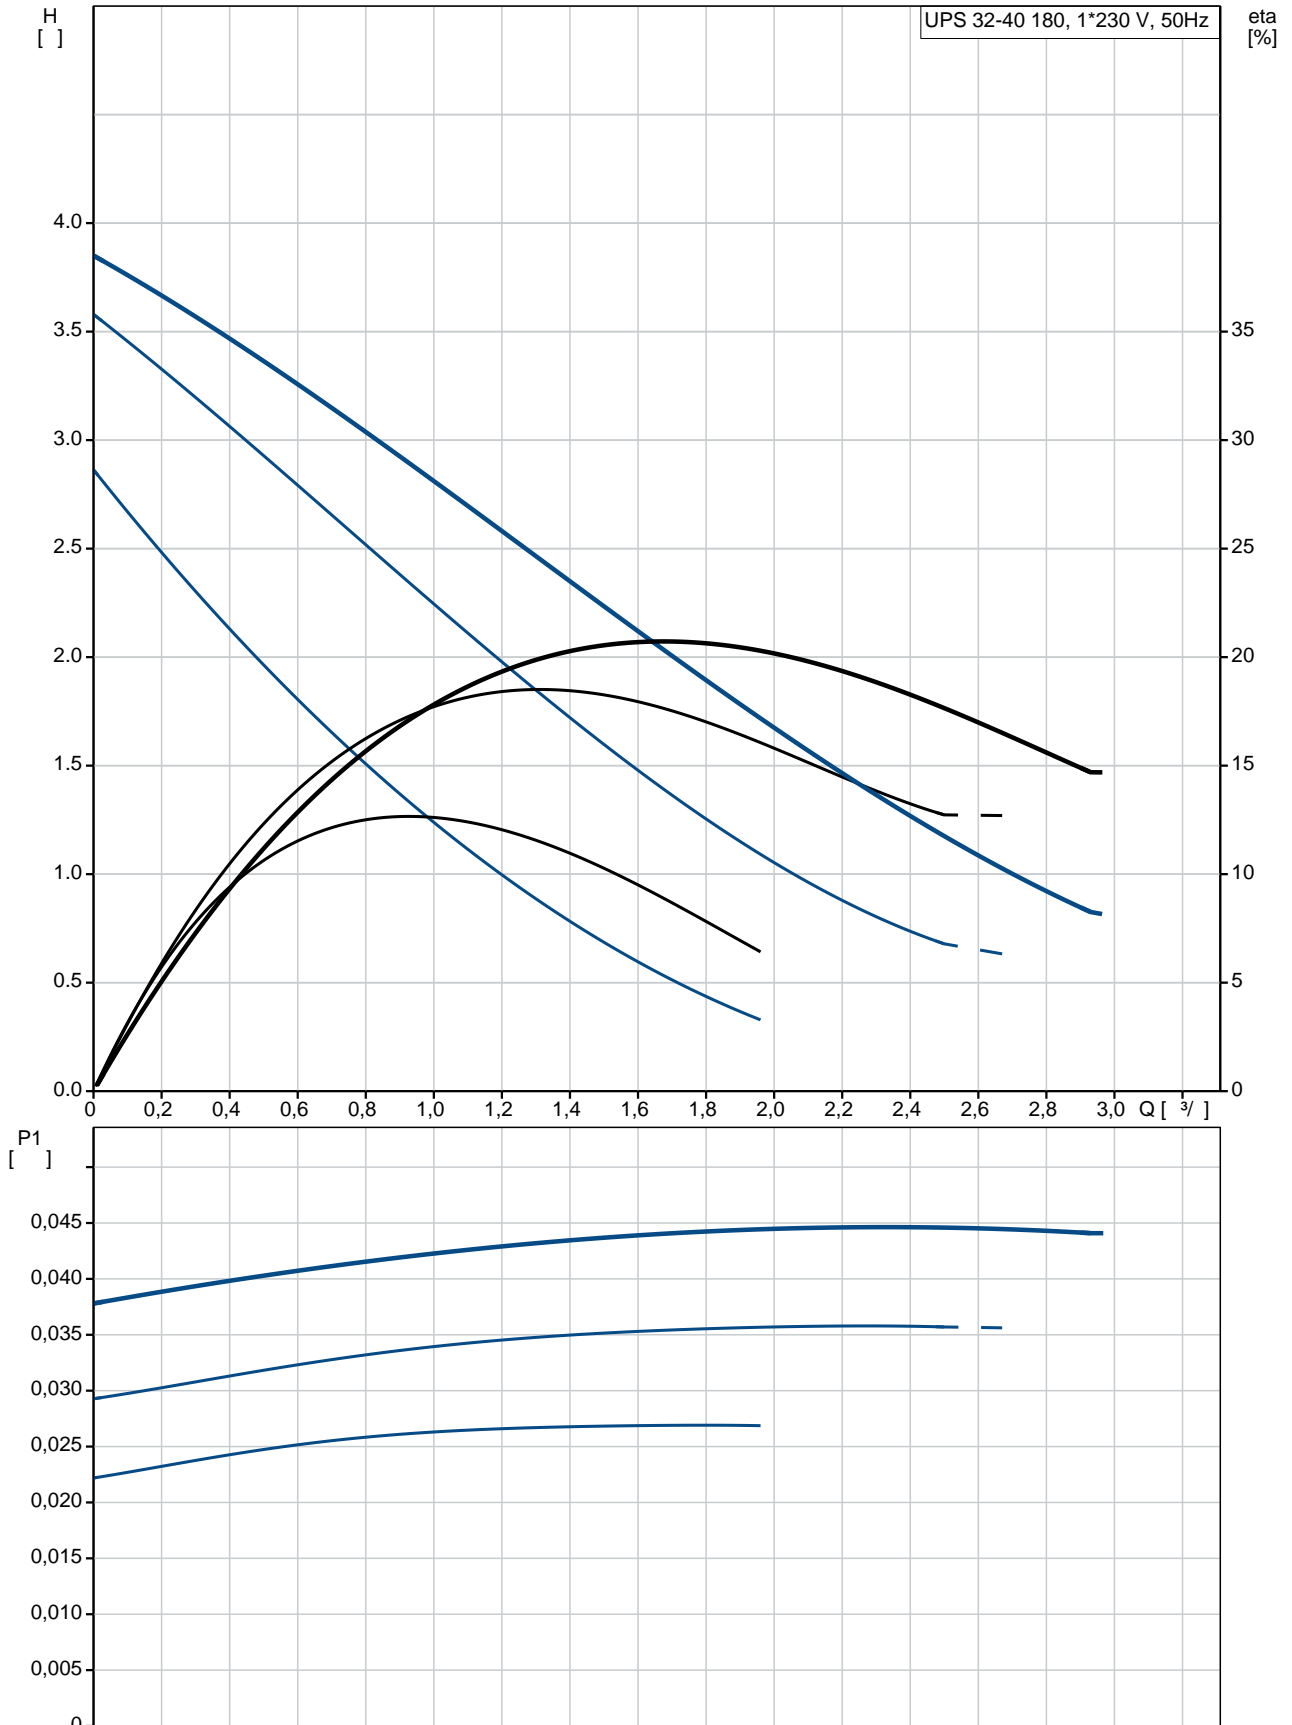

UPS 32-40 180	
96281389	
EAN	5700830494929
3	
40	
TF	110
	EAC
EN-JL1030	
ASTM 30 B	
	, PES/PP
40 °C	
80 °C:	
10	
G 2	
PN 10	
180	
2 .. 110 °C	
60 °C	
983.2 / ³	
1.5	
25	
35	
45	
50 Hz	
1 x 230 V	
1: 0.12 A	
2: 0.16 A	
3: 0.2 A	
1.5	
(IEC 34-5): IP44	
(IEC 85): F	
9H	
2.6	
2.8	
0.004 ³	
RU	

