

1 UPS 40-180 F



: 96401977

* 3
*
*
*
*
*
*

- 1-

: -10 .. 120 °C
: 60 °C
983.2 / 3


: AAA,EAC

EN-JL1040
ASTM 35 B - 40 B




DIN W.-Nr. 1.4301
AISI 304

:
 : 0 .. 40 °C
 : 10
 : DIN
 : DN 40
 : PN 6 / PN 10
 : 250
 :
 C : 25
 : 1: 650
 : 2: 730
 : 790
 : 50 Hz
 : 1 x 230-240 V
 : 1: 3.15 A
 : 2: 3.5 A
 : 3: 3.65 A
 Cos 1: 0,9
 Cos 2: 0,91
 Cos : 0,94
 : 25 /400 V
 (IEC 85): H
 Enclosure class (IEC 60529): X4D
 :
 : 22.6
 : 25.3
 : 0.043 ³

96401977 UPS 40-180 F 50

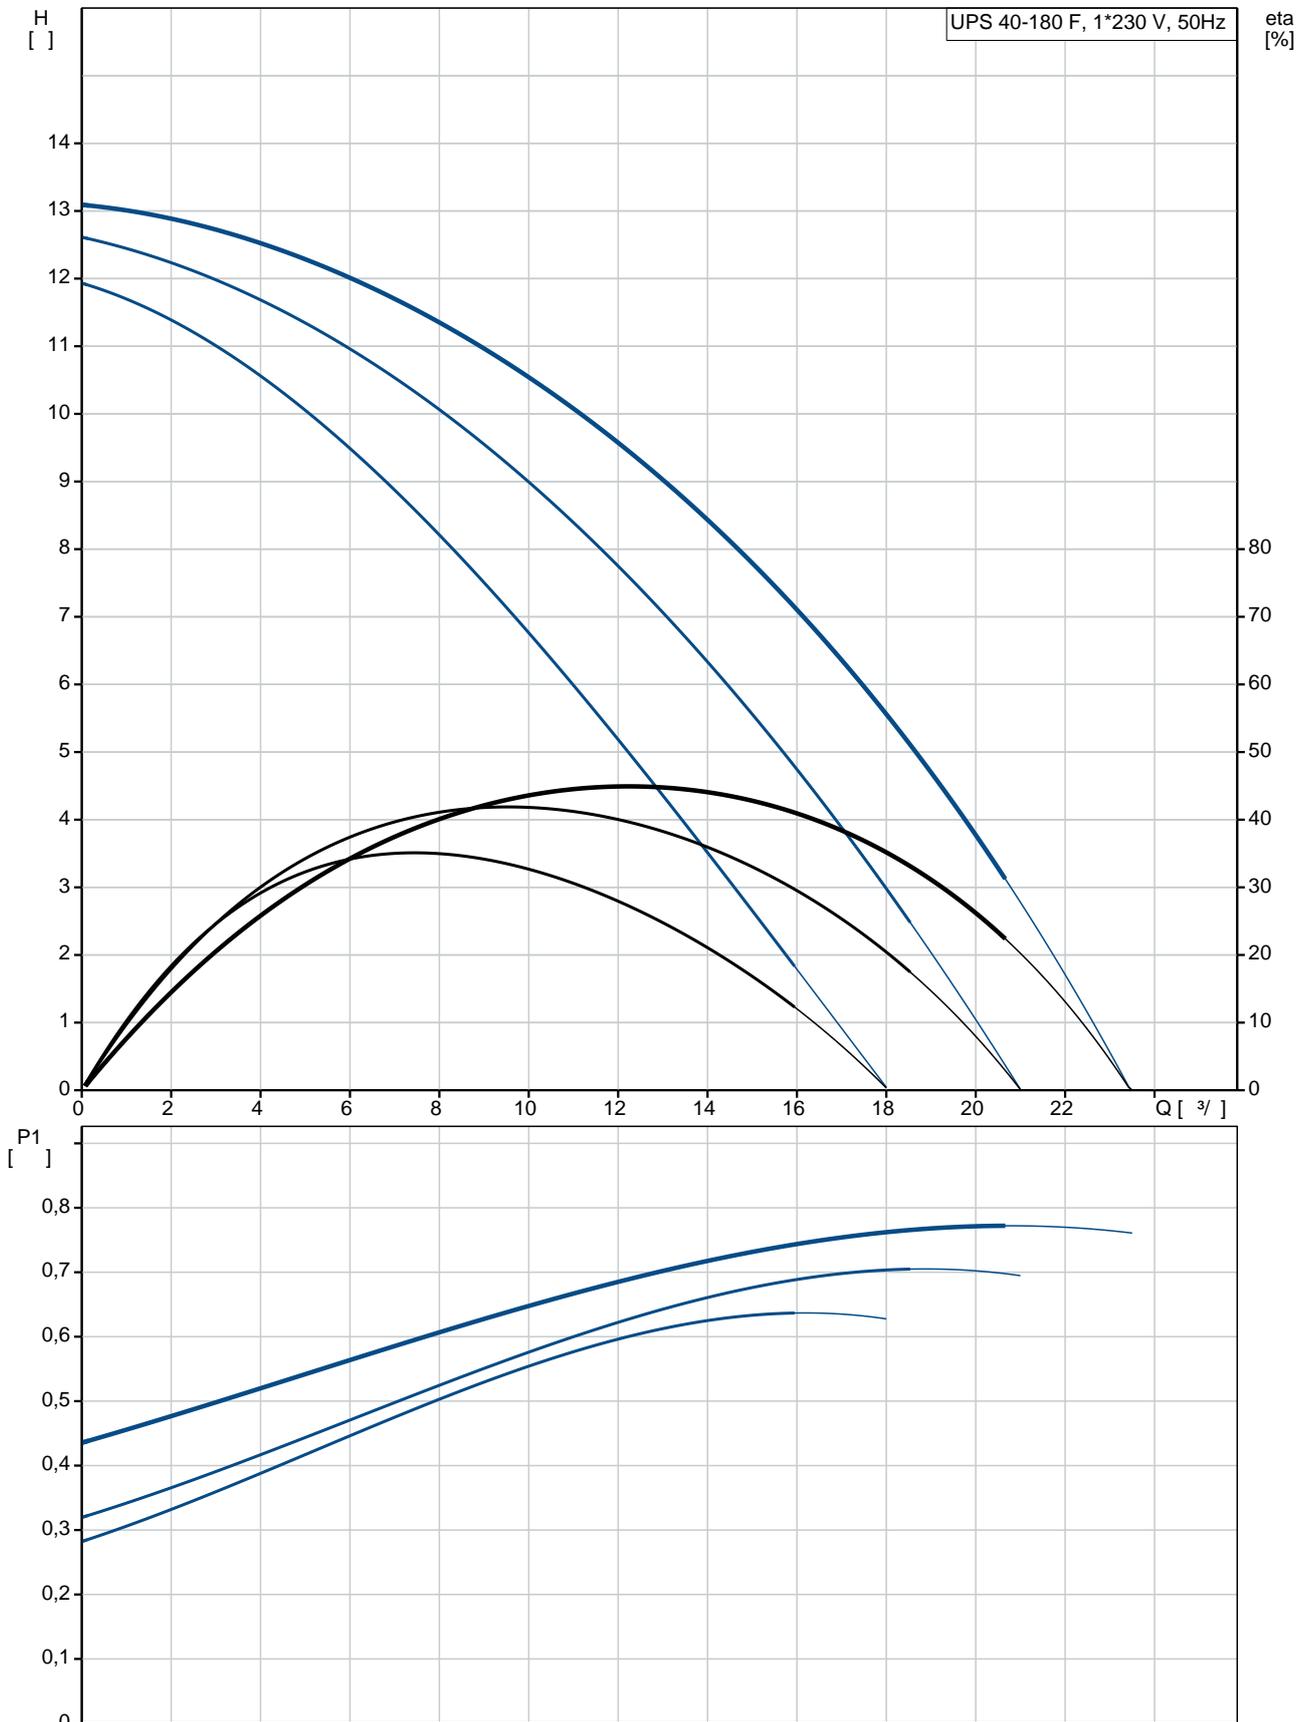

		UPS 40-180 F
		96401977
EAN		5700390656188
		3
		180
		AAA,EAC
		EN-JL1040
		ASTM 35 B - 40 B
		DIN W.-Nr. 1.4301
		AISI 304
		0 .. 40 °C
		10
		DIN
		DN 40
		PN 6 / PN 10
		250
		-10 .. 120 °C
		60 °C
		983.2 / 3
C		25
		1: 650
		2: 730
		790
		50 Hz
		1 x 230-240 V
	1:	3.15 A
	2:	3.5 A
	3:	3.65 A
Cos	1:	0,9
Cos	2:	0,91
Cos		0,94
		25 /400 V
	(IEC 85):	H
	Enclosure class (IEC 60529):	X4D
		CONTACT
		1.30H
		22.6

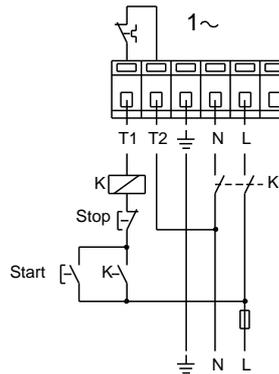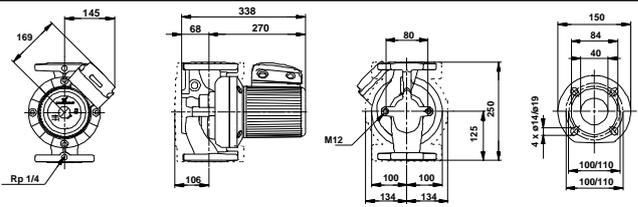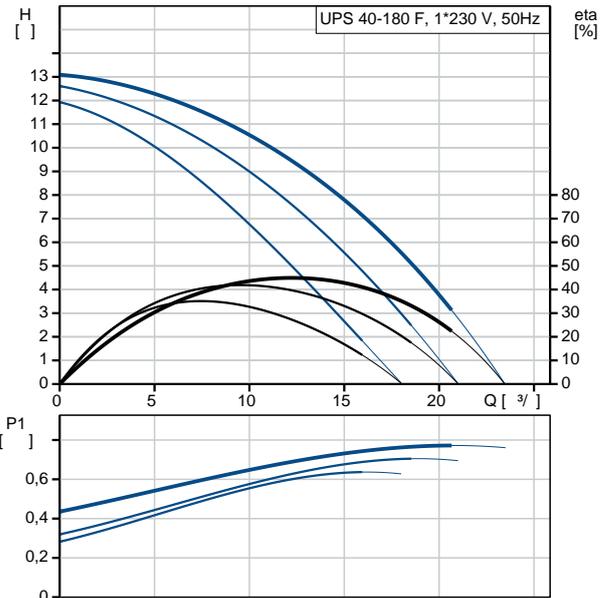



Email:

+380971357799
a422@i.ua

: 25.3
: 0.043³