

1 UPS 40-185 F



: 96430296

\* 3  
\*  
\*  
\*  
\*  
\*  
\*

-3-

: -10 .. 120 °C  
: 60 °C  
983.2 / 3


: AAA,EAC

EN-JL1040  
ASTM 35 B - 40 B

DIN W.-Nr. 1.4301  
AISI 304

:  
: 0 .. 40 °C  
: 10  
: DIN  
: DN 40  
: PN 6 / PN 10  
: 250  
:  
1: 620  
2: 705  
: 975  
: 50 Hz  
: 3 x 400-415 V  
1: 1.04 A  
2: 1.18 A  
3: 1.8 A  
Cos 1: 0,86  
Cos 2: 0,86  
Cos : 0,78  
(IEC 85): H  
Enclosure class (IEC 60529): X4D  
:  
: 21  
: 21.4  
: 0.034<sup>3</sup>

## 96430296 UPS 40-185 F 50

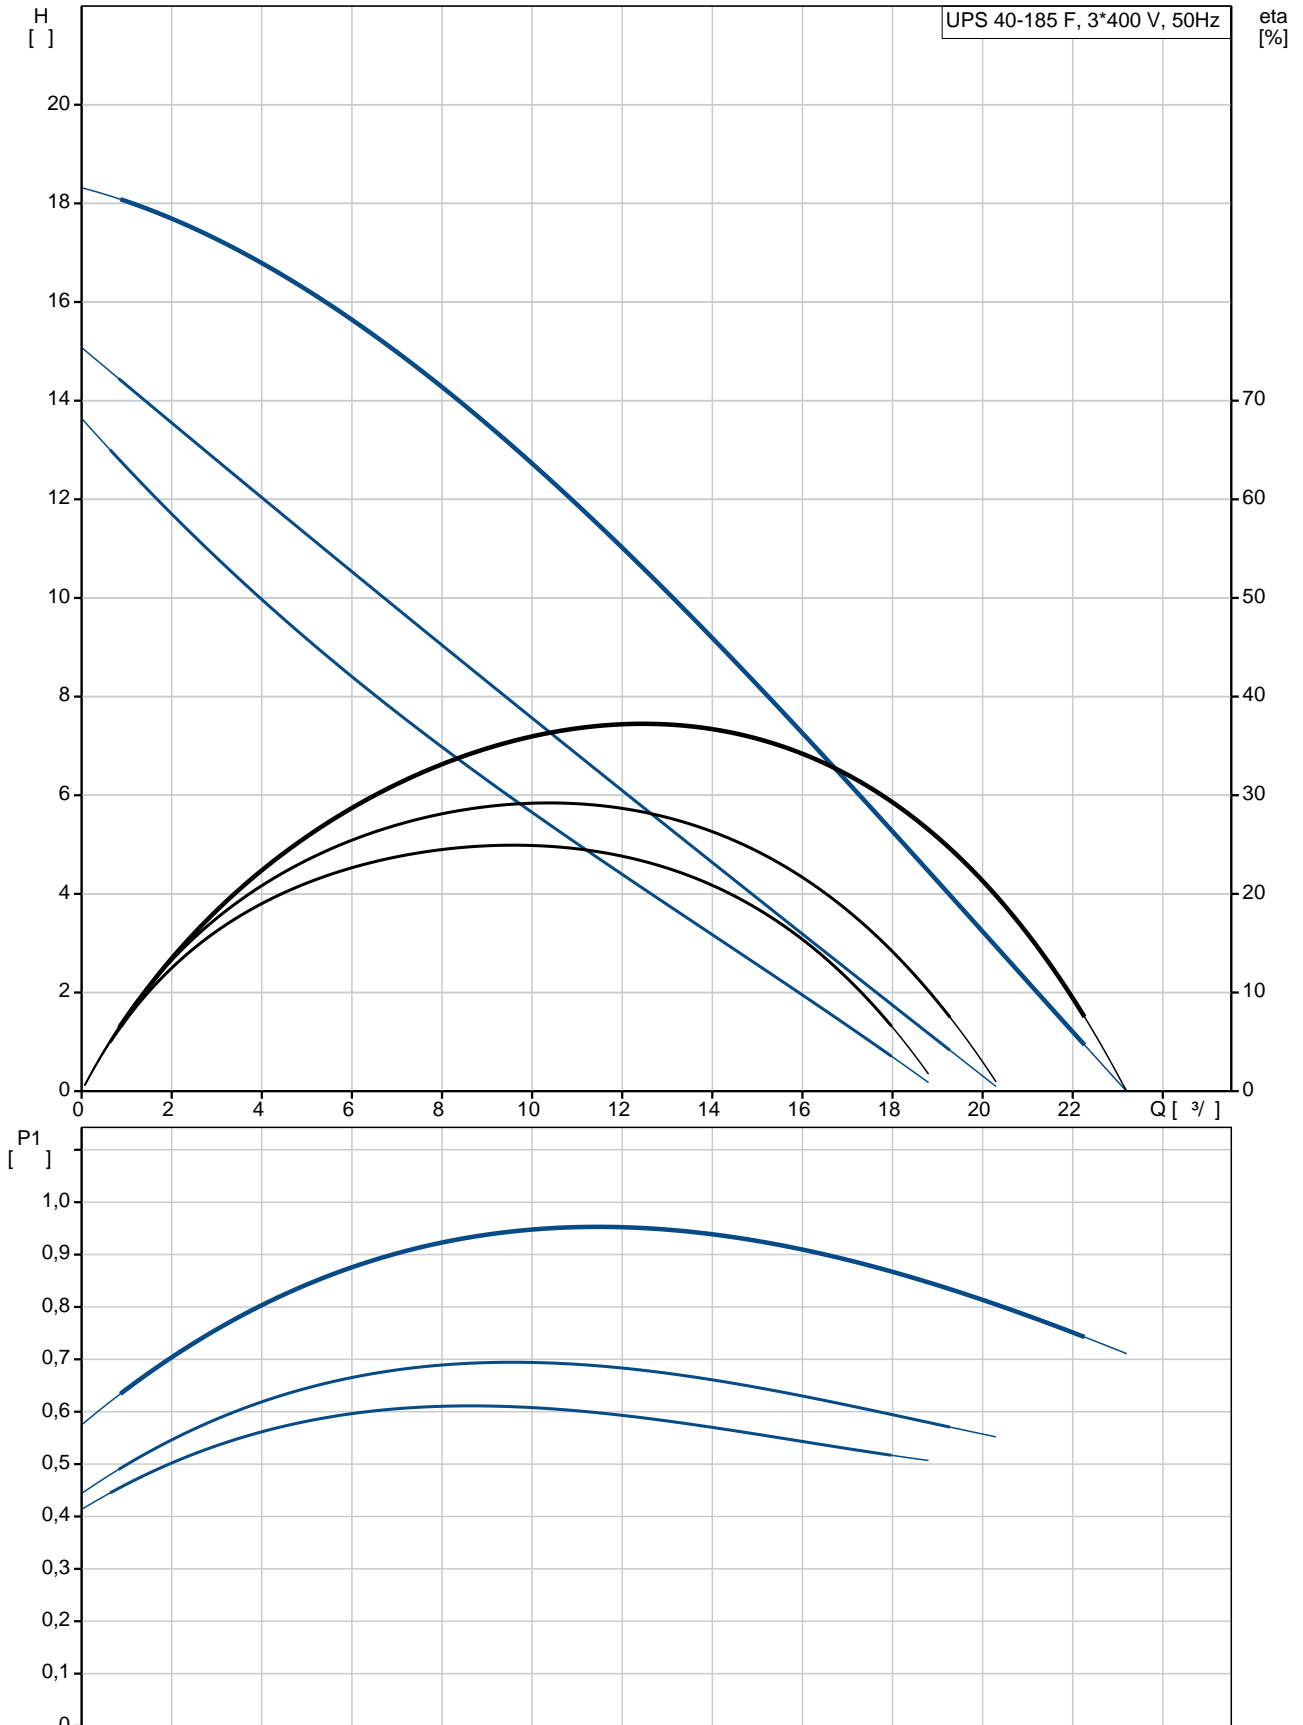

		UPS 40-185 F
		<a href="#">96430296</a>
EAN		5700392948090
		3
		185
		AAA,EAC
		EN-JL1040
		ASTM 35 B - 40 B
		DIN W.-Nr. 1.4301
		AISI 304
		0 .. 40 °C
		10
		DIN
		DN 40
		PN 6 / PN 10
		250
		-10 .. 120 °C
		60 °C
		983.2 / ³
		1: 620
		2: 705
		975
		50 Hz
		3 x 400-415 V
	1:	1.04 A
	2:	1.18 A
	3:	1.8 A
Cos	1:	0,86
Cos	2:	0,86
Cos		0,78
	(IEC 85):	H
Enclosure class (IEC 60529):		X4D
		CONTACT
		1.30H
		21
		21.4
		0.034 ³

