

1 UPS 50-120 F



: 96402101

* 3
*
*
*
*
*
*

- 1-

: -10 .. 120 °C
: 60 °C
983.2 / 3


: AAA,EAC

EN-JL1040
ASTM 35 B - 40 B




DIN W.-Nr. 1.4301
AISI 304

:
 : 0 .. 40 °C
 : 10
 : DIN
 : DN 50
 : PN 6 / PN 10
 : 280
 :
 C : 25
 : 1: 620
 : 2: 700
 : 760
 : 50 Hz
 : 1 x 230-240 V
 1: 3.05 A
 2: 3.35 A
 3: 3.6 A
 Cos 1: 0,88
 Cos 2: 0,91
 Cos : 0,92
 : 25 /400 V
 (IEC 85): H
 Enclosure class (IEC 60529): X4D
 :
 : 27.5
 : 28
 : 0.043 ³

96402101 UPS 50-120 F 50

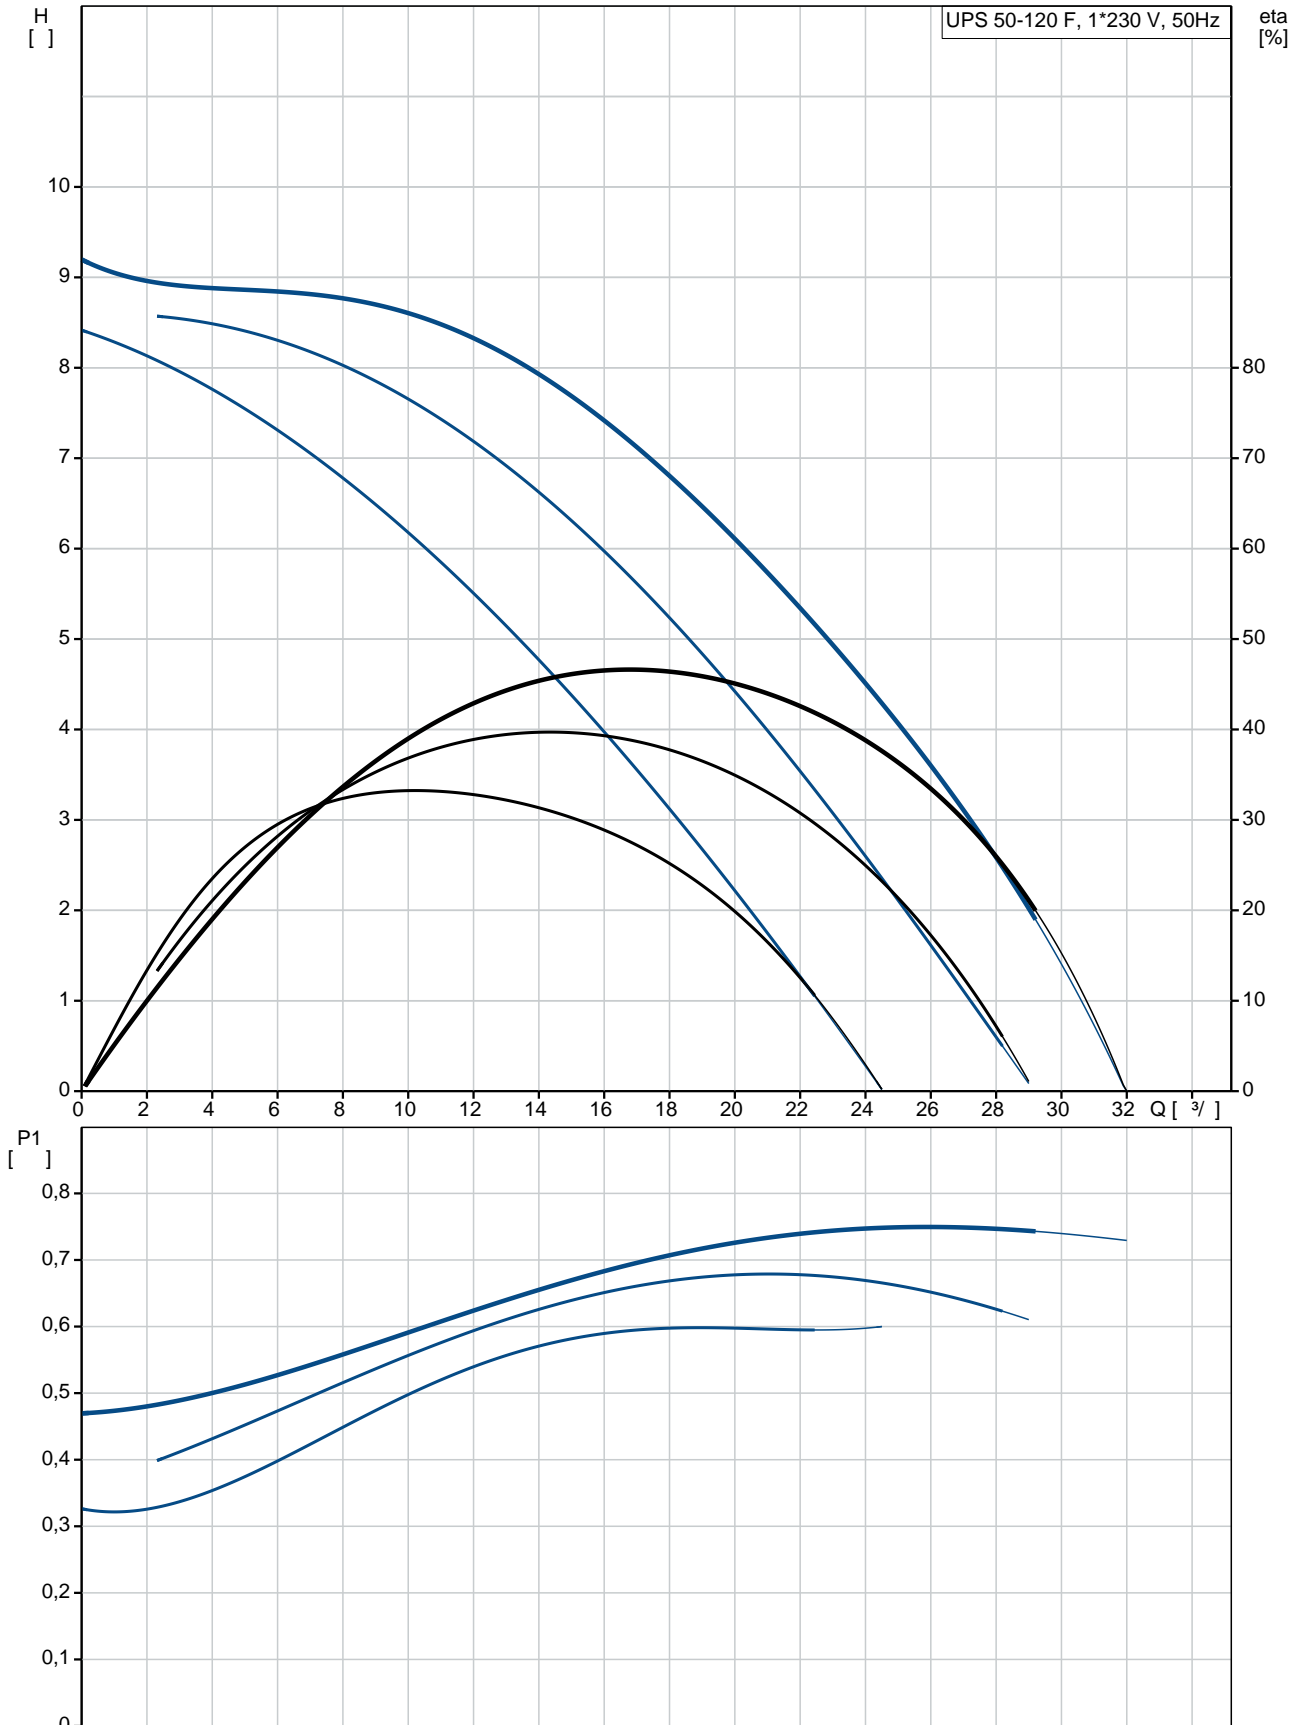

		UPS 50-120 F
		96402101
EAN		5700390659493
		3
		120
		AAA,EAC
		EN-JL1040
		ASTM 35 B - 40 B
		DIN W.-Nr. 1.4301
		AISI 304
		0 .. 40 °C
		10
		DIN
		DN 50
		PN 6 / PN 10
		280
		-10 .. 120 °C
		60 °C
		983.2 / 3
C		25
		1: 620
		2: 700
		760
		50 Hz
		1 x 230-240 V
	1:	3.05 A
	2:	3.35 A
	3:	3.6 A
Cos	1:	0,88
Cos	2:	0,91
Cos		0,92
		25 /400 V
	(IEC 85):	H
	Enclosure class (IEC 60529):	X4D
		CONTACT
		1.30H
		27.5

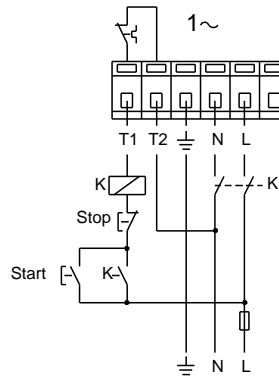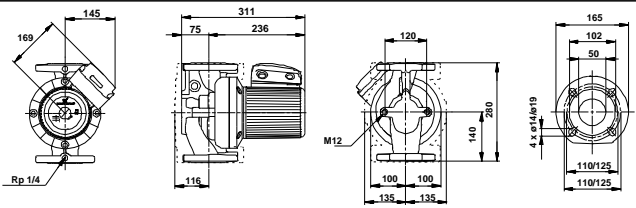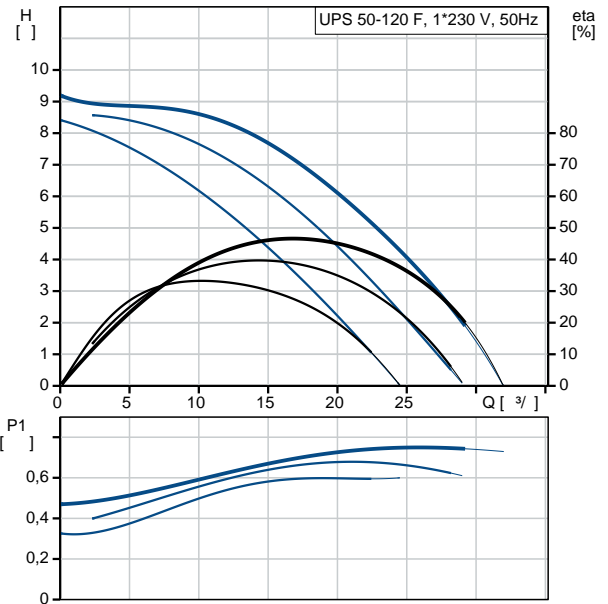



Email:

+380971357799
a422@i.ua

: 28
: 0.043³