

1 UPS 50-120 F



: 96402103

* 3
*
*
*
*
*
*

-3-

: -10 .. 120 °C
: 60 °C
983.2 / 3


: AAA,EAC

EN-JL1040
ASTM 35 B - 40 B

DIN W.-Nr. 1.4301
AISI 304

:
 : 0 .. 40 °C
 : 10
 : DIN
 : DN 50
 : PN 6 / PN 10
 : 280
 :
 : 1: 450
 : 2: 530
 : 720
 : 50 Hz
 : 3 x 400-415 V
 : 1: 0.82 A
 : 2: 0.94 A
 : 3: 1.3 A
 Cos 1: 0,79
 Cos 2: 0,81
 Cos : 0,8
 (IEC 85): H
 Enclosure class (IEC 60529): X4D
 :
 : 24.3
 : 25.8
 : 0.034 ³

96402103 UPS 50-120 F 50

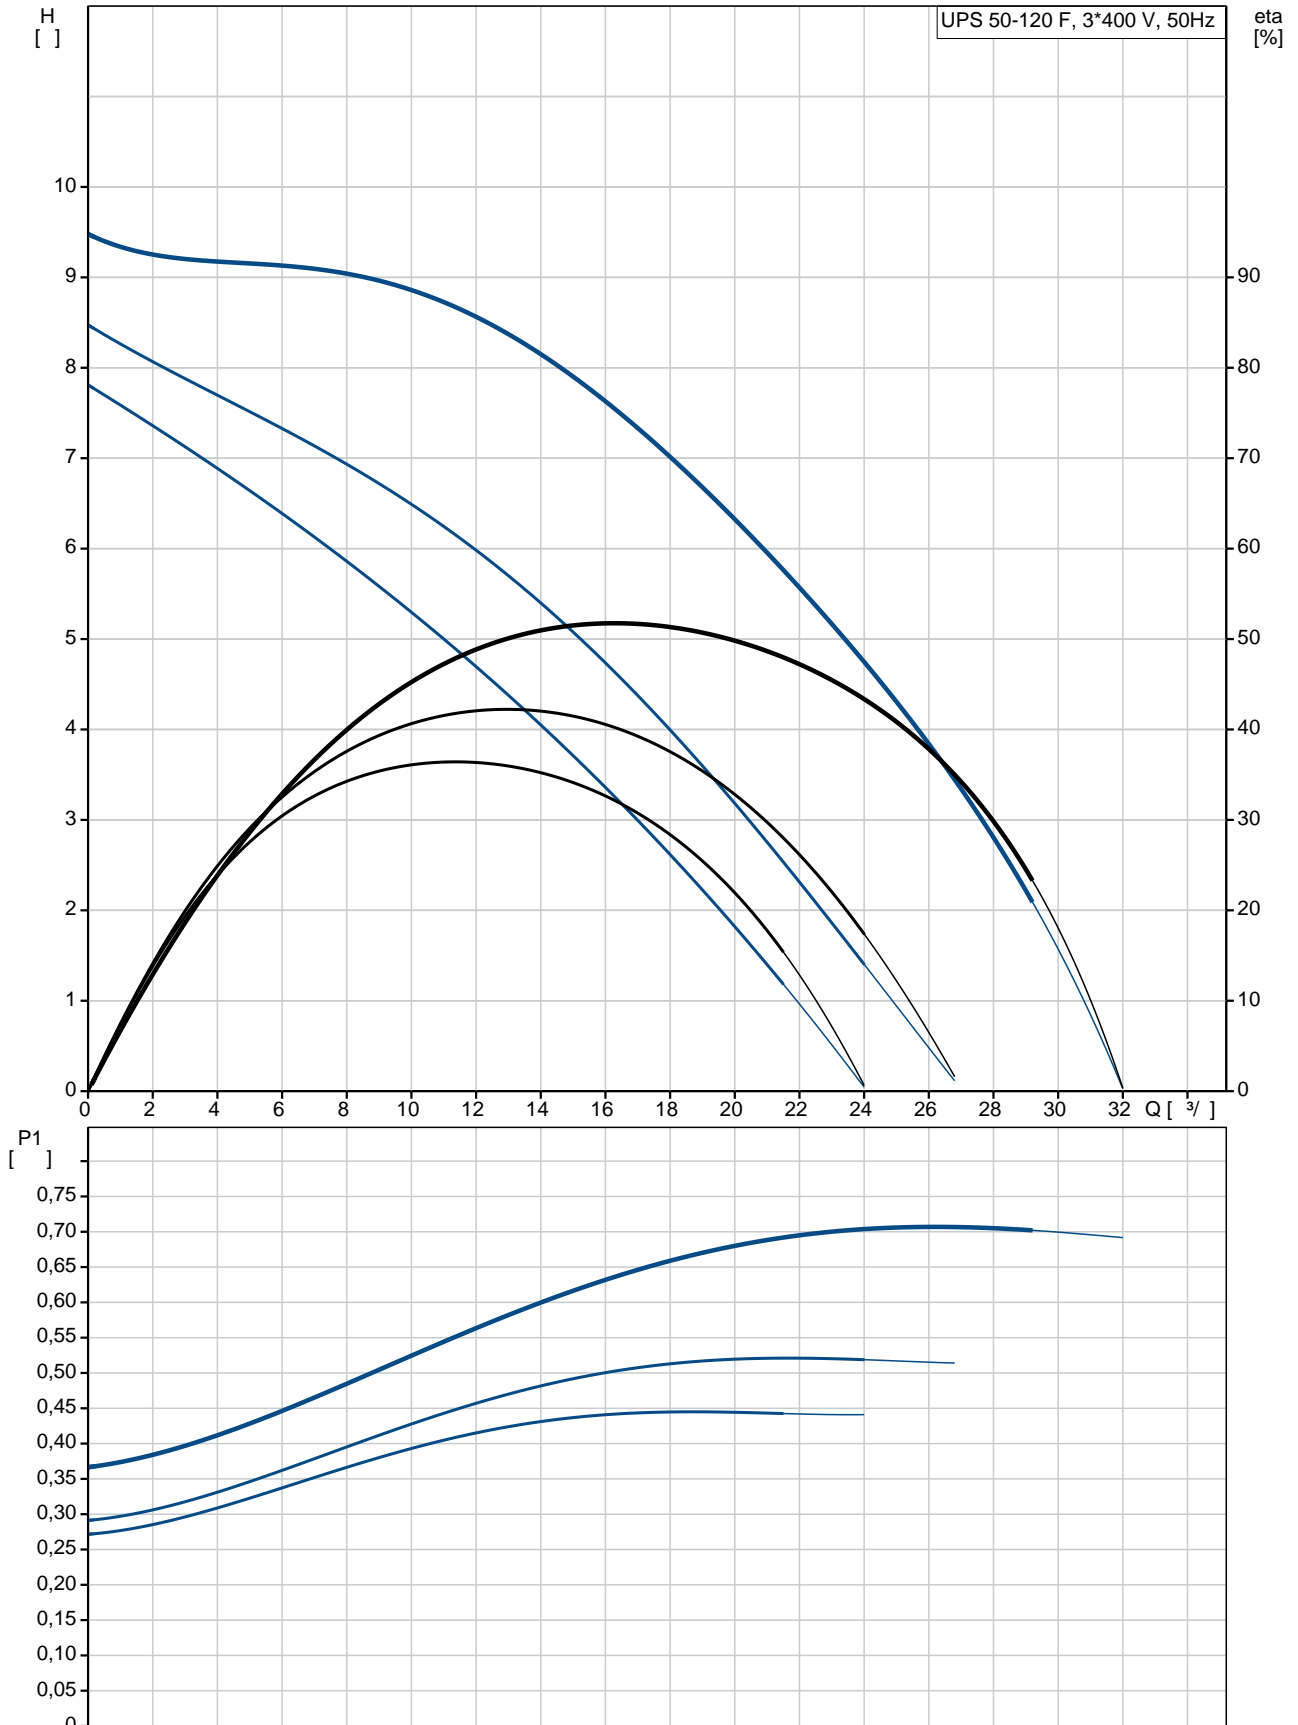

		UPS 50-120 F
		96402103
EAN		5708601058929
		3
		120
		AAA,EAC
		EN-JL1040
		ASTM 35 B - 40 B
		DIN W.-Nr. 1.4301
		AISI 304
		0 .. 40 °C
		10
		DIN
		DN 50
		PN 6 / PN 10
		280
		-10 .. 120 °C
		60 °C
		983.2 / 3
		1: 450
		2: 530
		720
		50 Hz
		3 x 400-415 V
	1:	0.82 A
	2:	0.94 A
	3:	1.3 A
Cos	1:	0,79
Cos	2:	0,81
Cos		0,8
	(IEC 85):	H
Enclosure class (IEC 60529):		X4D
		CONTACT
		1.30H
		24.3
		25.8
		0.034 3

