

1 UPS 50-185 F



: 96430300

\* 3  
\*  
\*  
\*  
\*  
\*  
\*

- 1-

: -10 .. 120 °C  
: 60 °C  
: 983.2 / 3


: AAA,EAC

EN-JL1040  
ASTM 35 B - 40 B




DIN W.-Nr. 1.4301  
AISI 304

:  
 : 0 .. 40 °C  
 : 10  
 : DIN  
 : DN 50  
 : PN 6 / PN 10  
 : 280  
 :  
 C : 30  
 : 1: 1150  
 : 2: 1240  
 : 1290  
 : 50 Hz  
 : 1 x 230-240 V  
 1: 5.6 A  
 2: 6.05 A  
 3: 6 A  
 Cos 1: 0,89  
 Cos 2: 0,89  
 Cos : 0,93  
 : 30 /400 V  
 (IEC 85): H  
 Enclosure class (IEC 60529): X4D  
 :  
 : 28  
 : 29.1  
 : 0.043 <sup>3</sup>

## 96430300 UPS 50-185 F 50

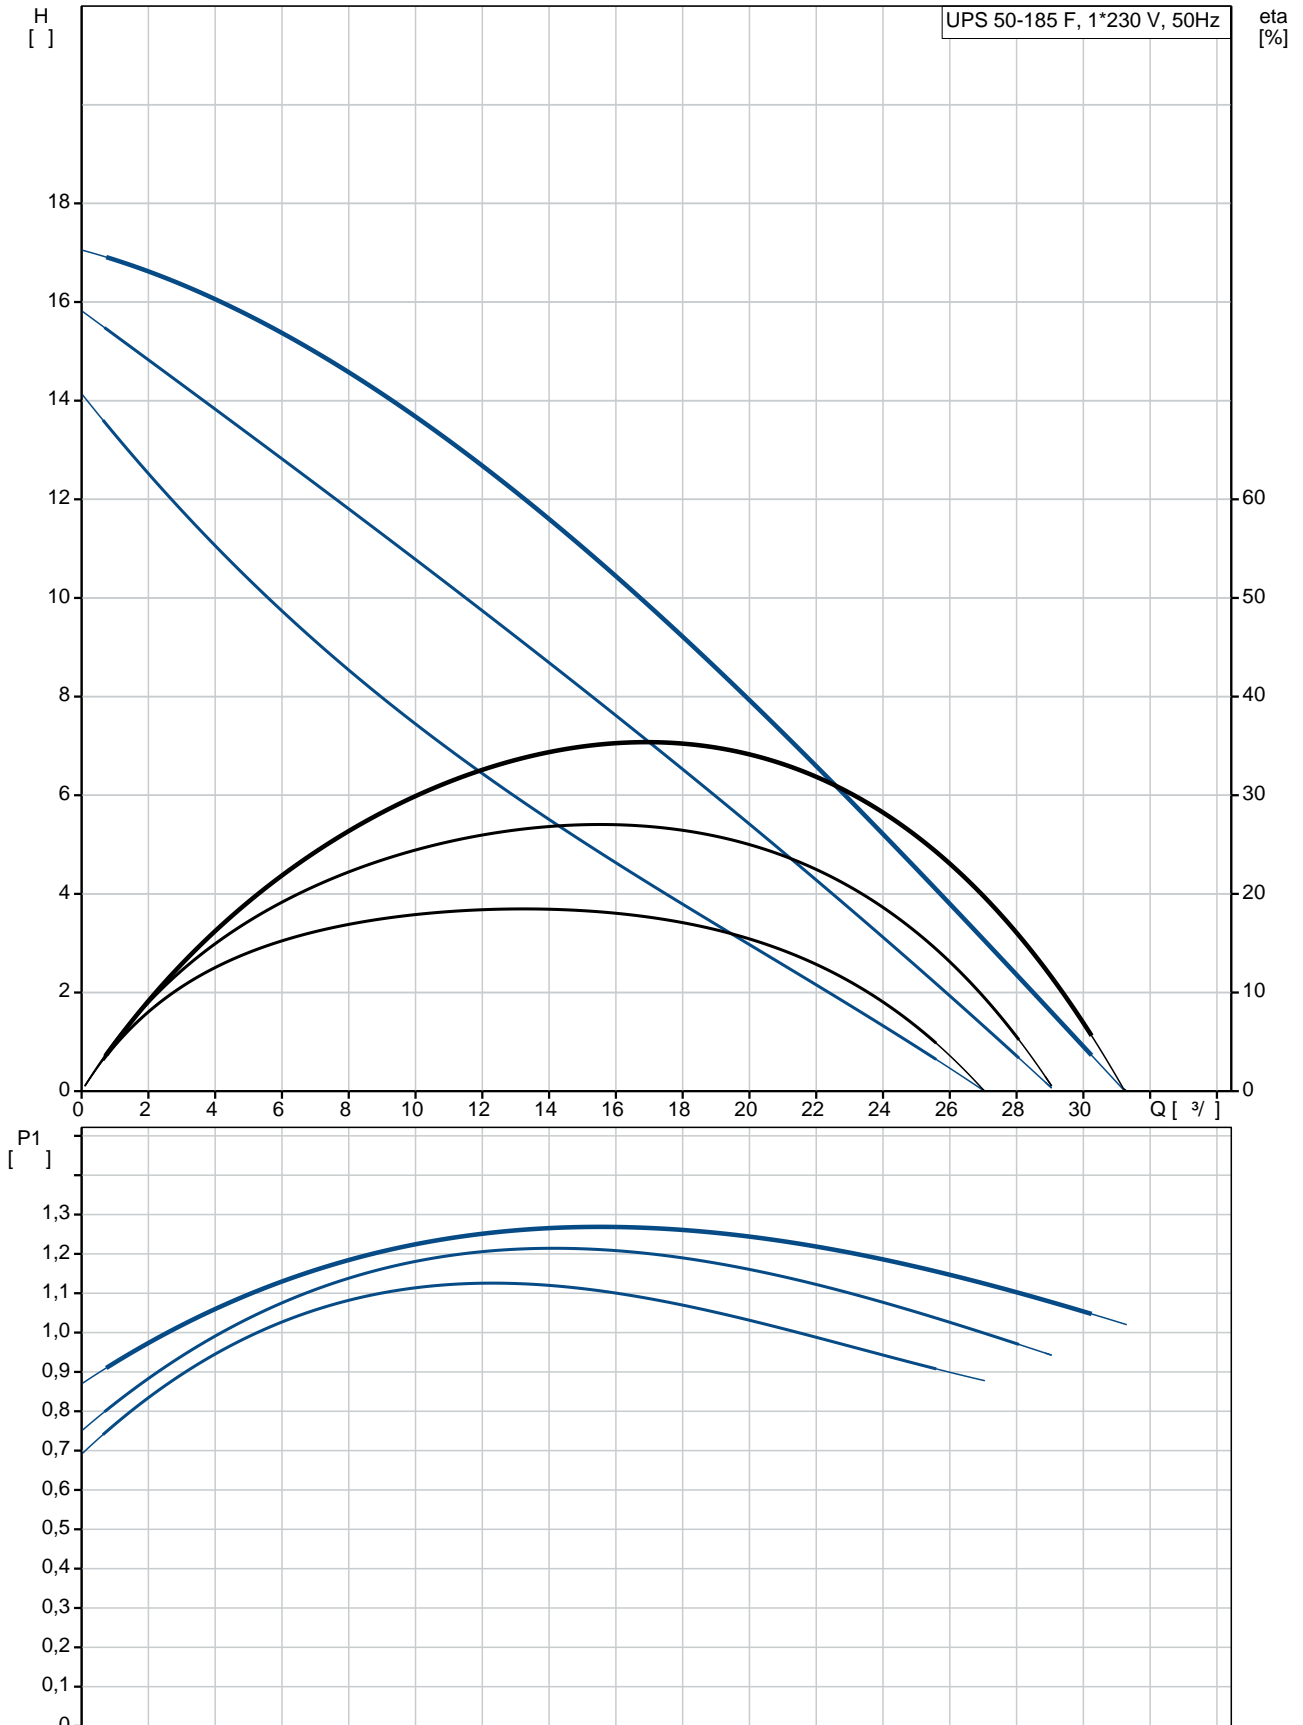

		UPS 50-185 F
		96430300
EAN		5700392948137
		3
		185
		AAA,EAC
		EN-JL1040
		ASTM 35 B - 40 B
		DIN W.-Nr. 1.4301
		AISI 304
		0 .. 40 °C
		10
		DIN
		DN 50
		PN 6 / PN 10
		280
		-10 .. 120 °C
		60 °C
		983.2 / 3
C		30
		1: 1150
		2: 1240
		1290
		50 Hz
		1 x 230-240 V
	1:	5.6 A
	2:	6.05 A
	3:	6 A
Cos	1:	0,89
Cos	2:	0,89
Cos		0,93
		30 /400 V
	(IEC 85):	H
Enclosure class (IEC 60529):		X4D
		CONTACT
		1.30H
		28

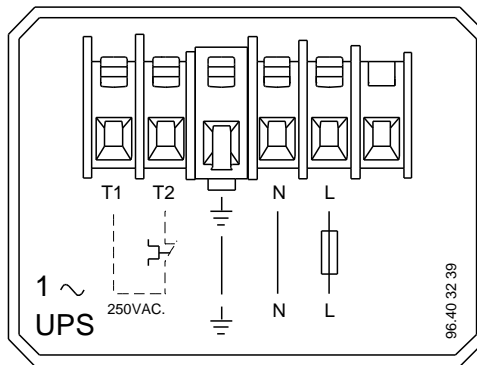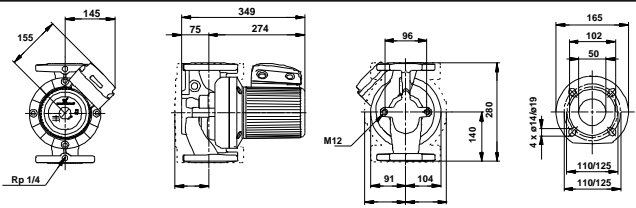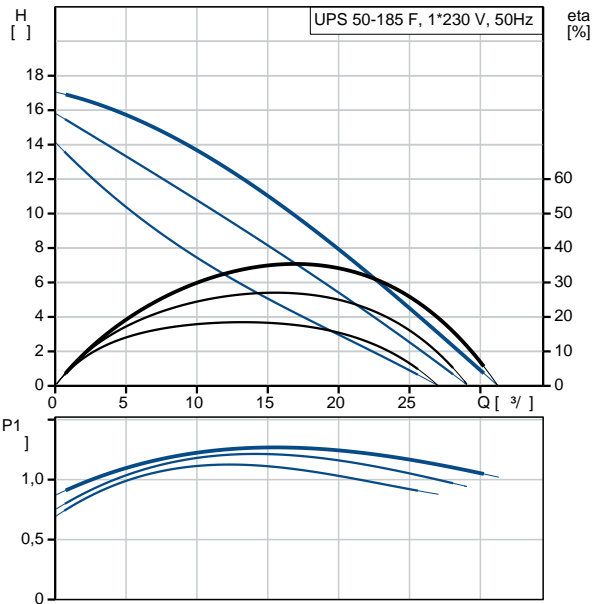



Email:

+380971357799  
a422@i.ua

: 29.1  
: 0.043<sup>3</sup>