

1 UPS 50-60/2 F



: 96402053

* 3
*
*
*
*
*
*

- 1-

: -10 .. 120 °C
: 60 °C
983.2 / 3



: AAA,EAC

EN-JL1040
ASTM 35 B - 40 B




DIN W.-Nr. 1.4301
AISI 304

:
 : 0 .. 40 °C
 : 10
 : DIN
 : DN 50
 : PN 6 / PN 10
 : 280
 :
 C : 10
 : 1: 350
 : 2: 380
 : 390
 : 50 Hz
 : 1 x 230-240 V
 : 1: 1.75 A
 : 2: 1.85 A
 : 3: 1.8 A
 Cos 1: 0.87
 Cos 2: 0.89
 Cos : 0.94
 : - : 10 /400 V
 : 2
 (IEC 85): H
 Enclosure class (IEC 60529): X4D
 :
 : 21.8
 : 22
 : 0.034 ³

96402053 UPS 50-60/2 F 50

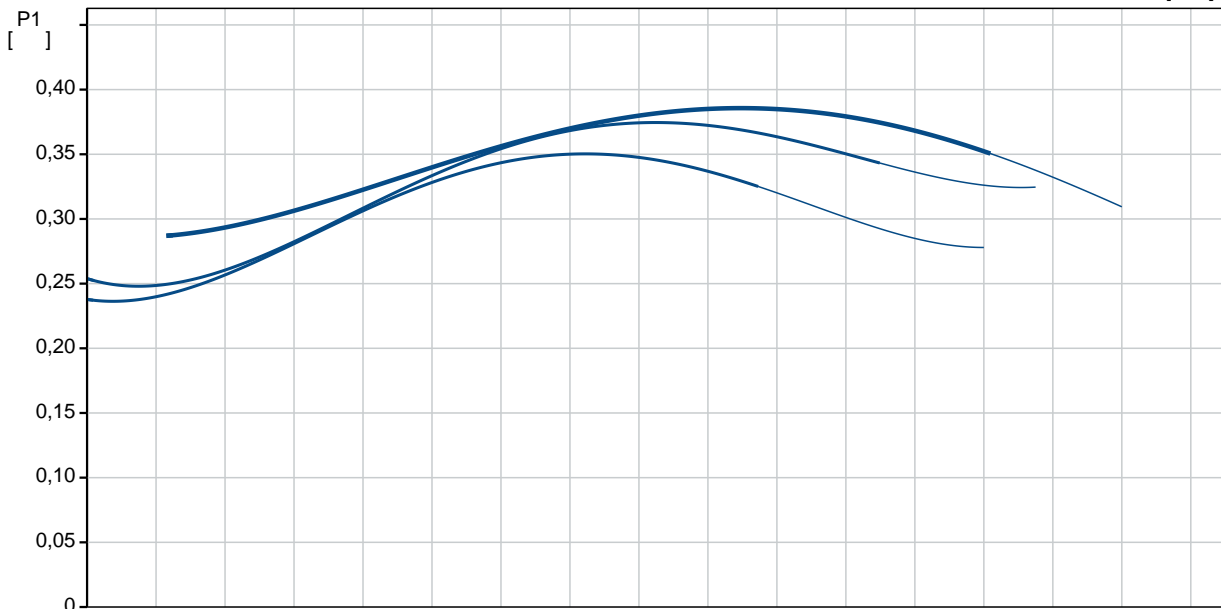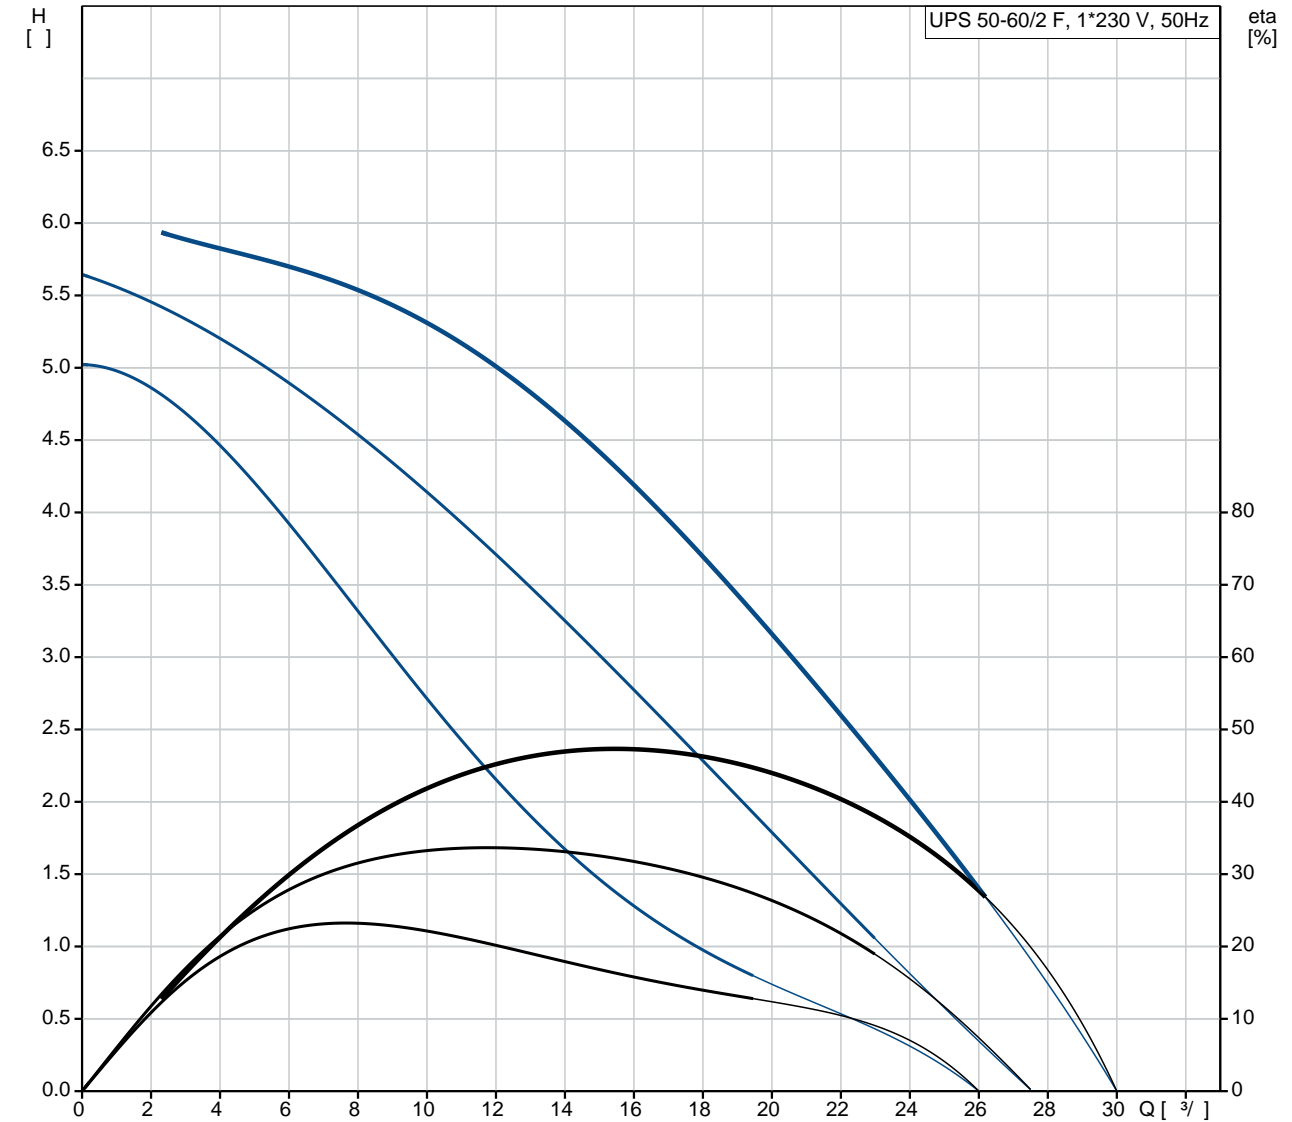

		UPS 50-60/2 F
		96402053
EAN		5700390658045
		3
		60
		AAA,EAC
		EN-JL1040
		ASTM 35 B - 40 B
		DIN W.-Nr. 1.4301
		AISI 304
		0 .. 40 °C
		10
		DIN
		DN 50
		PN 6 / PN 10
		280
		-10 .. 120 °C
		60 °C
		983.2 / 3
C		10
		1: 350
		2: 380
		390
		50 Hz
		1 x 230-240 V
	1:	1.75 A
	2:	1.85 A
	3:	1.8 A
Cos	1:	0,87
Cos	2:	0,89
Cos		0,94
		10 /400 V
		2
	(IEC 85):	H
	Enclosure class (IEC 60529):	X4D
		CONTACT
		1.30H

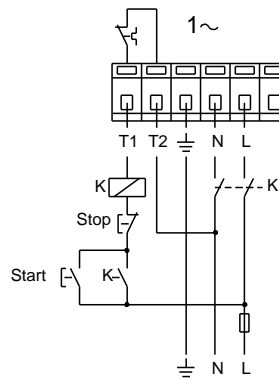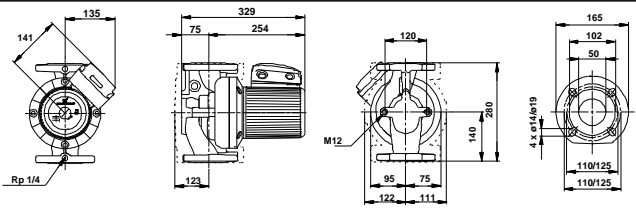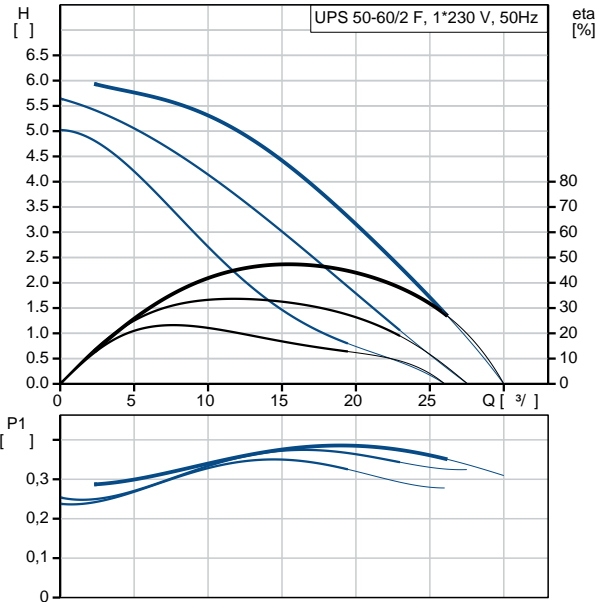



Email:

+380971357799
a422@i.ua

:	21.8
:	22
:	0.034 ³