

1 UPS 65-120 F



: 96402278

* 3
*
*
*
*
*
*

- 1-

: -10 .. 120 °C
: 60 °C
983.2 / 3


: AAA,EAC

EN-JL1040
ASTM 35 B - 40 B




DIN W.-Nr. 1.4301
AISI 304

:
 : 0 .. 40 °C
 : 10
 : DIN
 : DN 65
 : PN 6 / PN 10
 : 340
 :
 C : 30
 : 1: 1050
 : 2: 1150
 : 1200
 : 50 Hz
 : 1 x 230-240 V
 1: 5.1 A
 2: 5.6 A
 3: 5.5 A
 Cos 1: 0,9
 Cos 2: 0,89
 Cos : 0,95
 : 30 /400 V
 (IEC 85): H
 Enclosure class (IEC 60529): X4D
 :
 : 27.2
 : 33
 : 0.043 ³

96402278 UPS 65-120 F 50

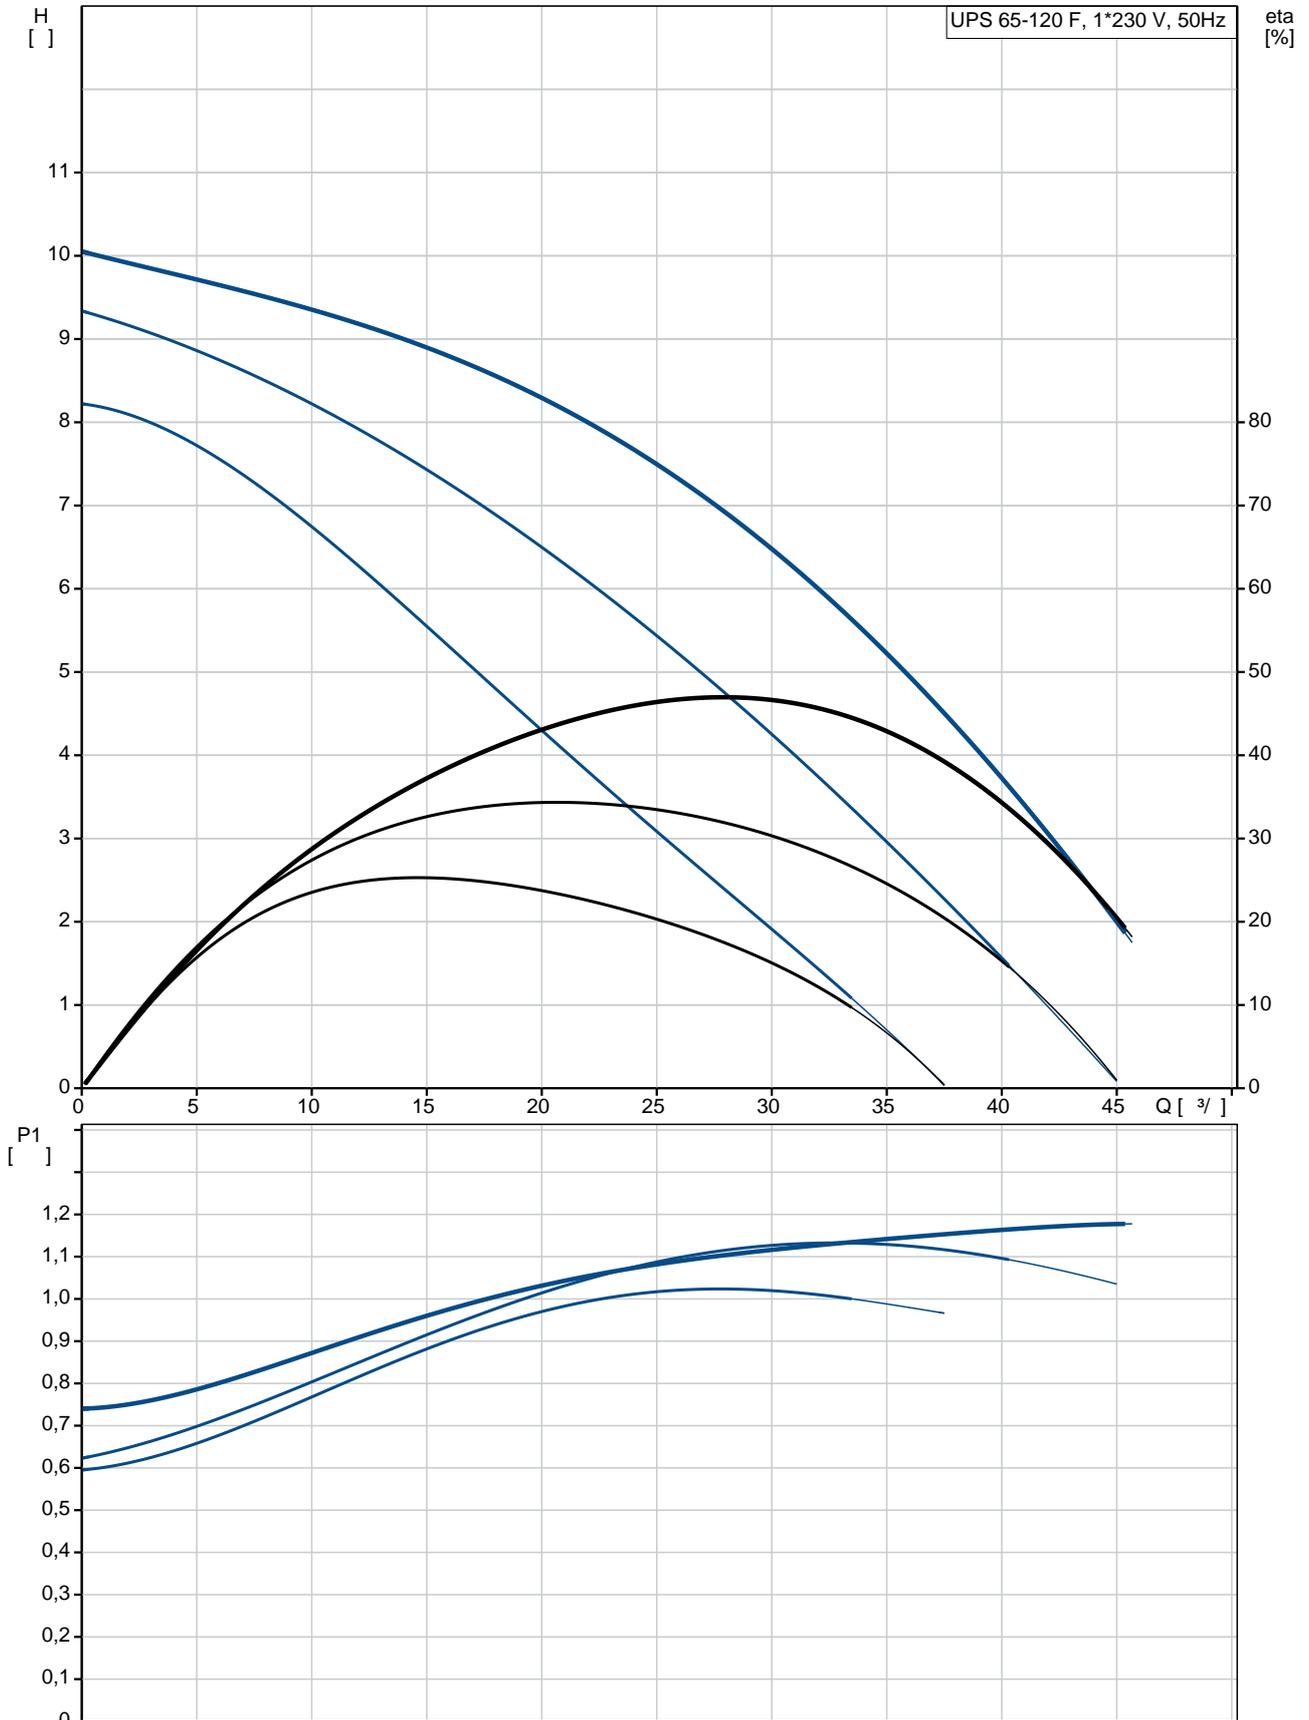

		UPS 65-120 F
		96402278
EAN		5700390664947
		3
		120
		AAA,EAC
		EN-JL1040
		ASTM 35 B - 40 B
		DIN W.-Nr. 1.4301
		AISI 304
		0 .. 40 °C
		10
		DIN
		DN 65
		PN 6 / PN 10
		340
		-10 .. 120 °C
		60 °C
		983.2 / 3
C		30
		1: 1050
		2: 1150
		1200
		50 Hz
		1 x 230-240 V
	1:	5.1 A
	2:	5.6 A
	3:	5.5 A
Cos	1:	0,9
Cos	2:	0,89
Cos		0,95
		30 /400 V
	(IEC 85):	H
Enclosure class (IEC 60529):		X4D
		CONTACT
		1.30H
		27.2

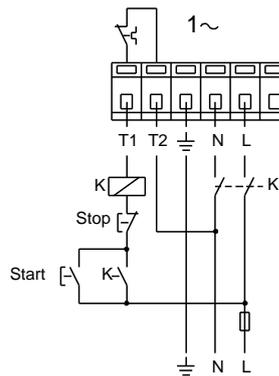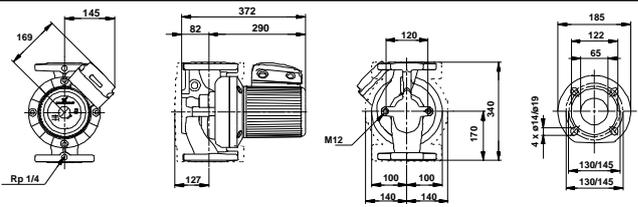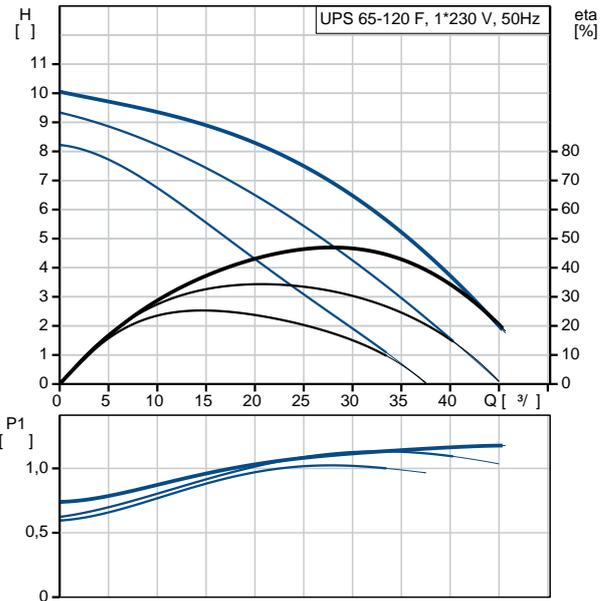



Email:

+380971357799
a422@i.ua

: 33
: 0.043³