

1 UPS 65-60/2 F



: 96402258

\* 3  
\*  
\*  
\*  
\*  
\*  
\*

- 1-

: -10 .. 120 °C  
: 60 °C  
983.2 / 3


: AAA,EAC

EN-JL1040  
ASTM 35 B - 40 B




DIN W.-Nr. 1.4301  
AISI 304

:  
 : 0 .. 40 °C  
 : 10  
 : DIN  
 : DN 65  
 : PN 6 / PN 10  
 : 340  
 :  
 C : 16  
 : 1: 450  
 : 2: 470  
 : 510  
 : 50 Hz  
 : 1 x 230-240 V  
 1: 2.15 A  
 2: 2.2 A  
 3: 2.4 A  
 Cos 1: 0,91  
 Cos 2: 0,93  
 Cos : 0,92  
 : 16 /400 V  
 : 2  
 (IEC 85): H  
 Enclosure class (IEC 60529): X4D  
 :  
 : 25.6  
 : 26.3  
 : 0.043 <sup>3</sup>

## 96402258 UPS 65-60/2 F 50

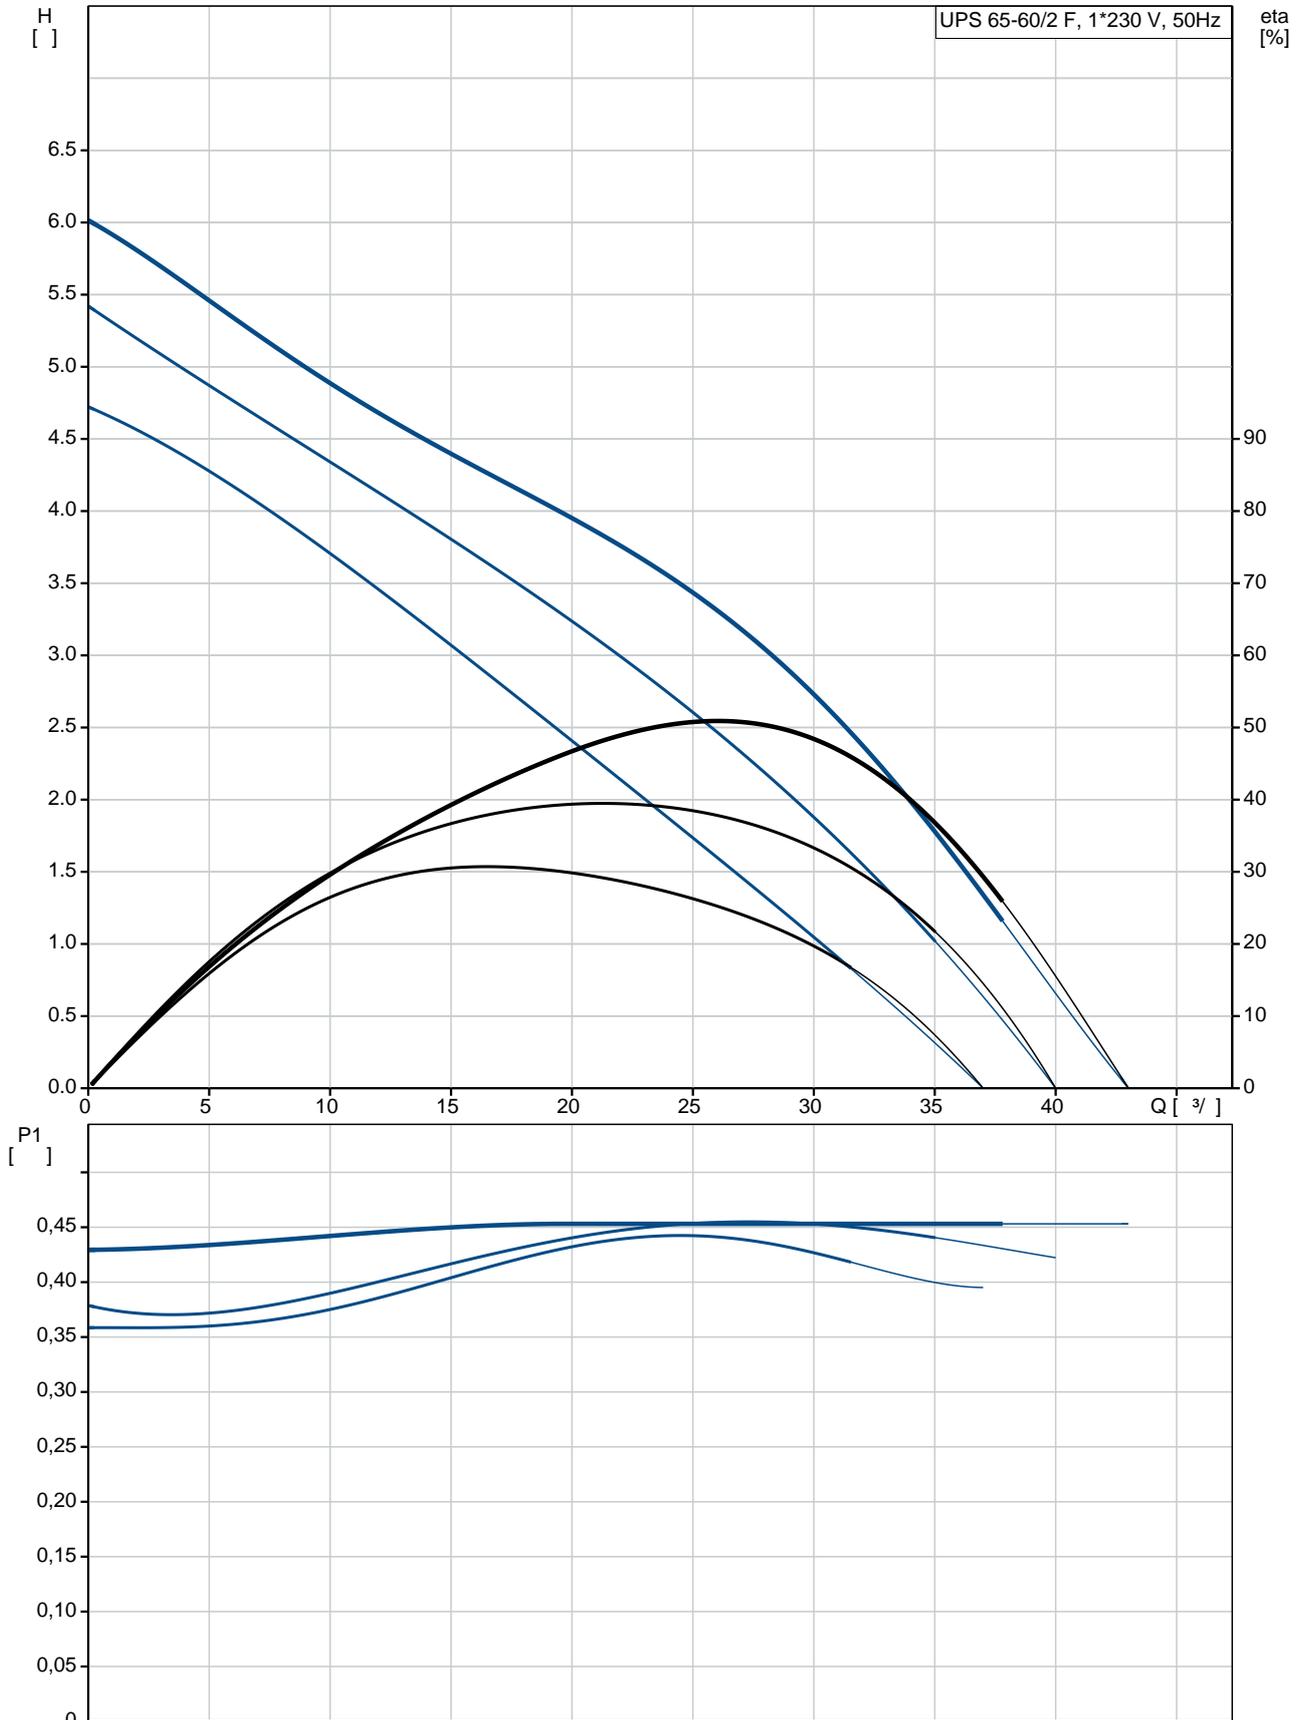

		UPS 65-60/2 F
		96402258
EAN		5700390664367
		3
		60
		AAA,EAC
		EN-JL1040
		ASTM 35 B - 40 B
		DIN W.-Nr. 1.4301
		AISI 304
		0 .. 40 °C
		10
		DIN
		DN 65
		PN 6 / PN 10
		340
		-10 .. 120 °C
		60 °C
		983.2 / 3
C		16
		1: 450
		2: 470
		510
		50 Hz
		1 x 230-240 V
	1:	2.15 A
	2:	2.2 A
	3:	2.4 A
Cos	1:	0,91
Cos	2:	0,93
Cos		0,92
		16 /400 V
		2
	(IEC 85):	H
	Enclosure class (IEC 60529):	X4D
		CONTACT
		1.30H

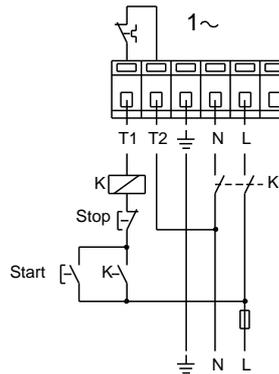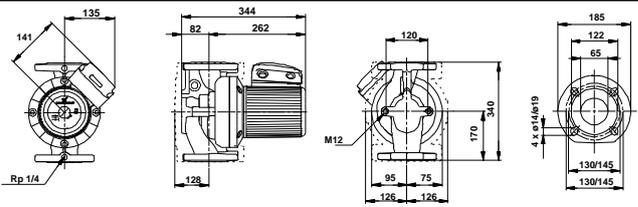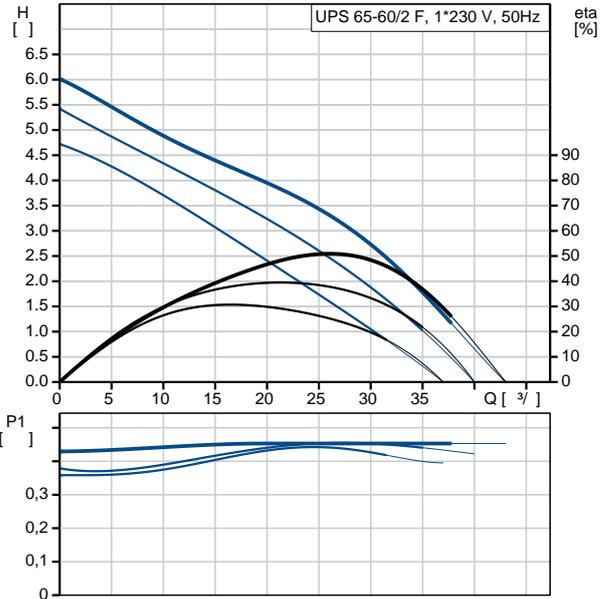



Email:

+380971357799  
a422@i.ua

:	25.6
:	26.3
:	0.043 <sup>3</sup>