

1 UPS 65-60/2 F



: 96402260

* 3
*
*
*
*
*
*

-3-

: -10 .. 120 °C
: 60 °C
983.2 / 3


: AAA,EAC

EN-JL1040
ASTM 35 B - 40 B




DIN W.-Nr. 1.4301
AISI 304

:
: 0 .. 40 °C
: 10
: DIN
: DN 65
: PN 6 / PN 10
: 340
:
1: 330
2: 370
:
: 490
: 50 Hz
: 3 x 400-415 V
1: 0.56 A
2: 0.64 A
3: 1.05 A
Cos 1: 0,85
Cos 2: 0,83
Cos : 0,67
:
(IEC 85): F
Enclosure class (IEC 60529): X4D
:
: 25.6
:
: 26.1
:
: 0.043 ³

96402260 UPS 65-60/2 F 50

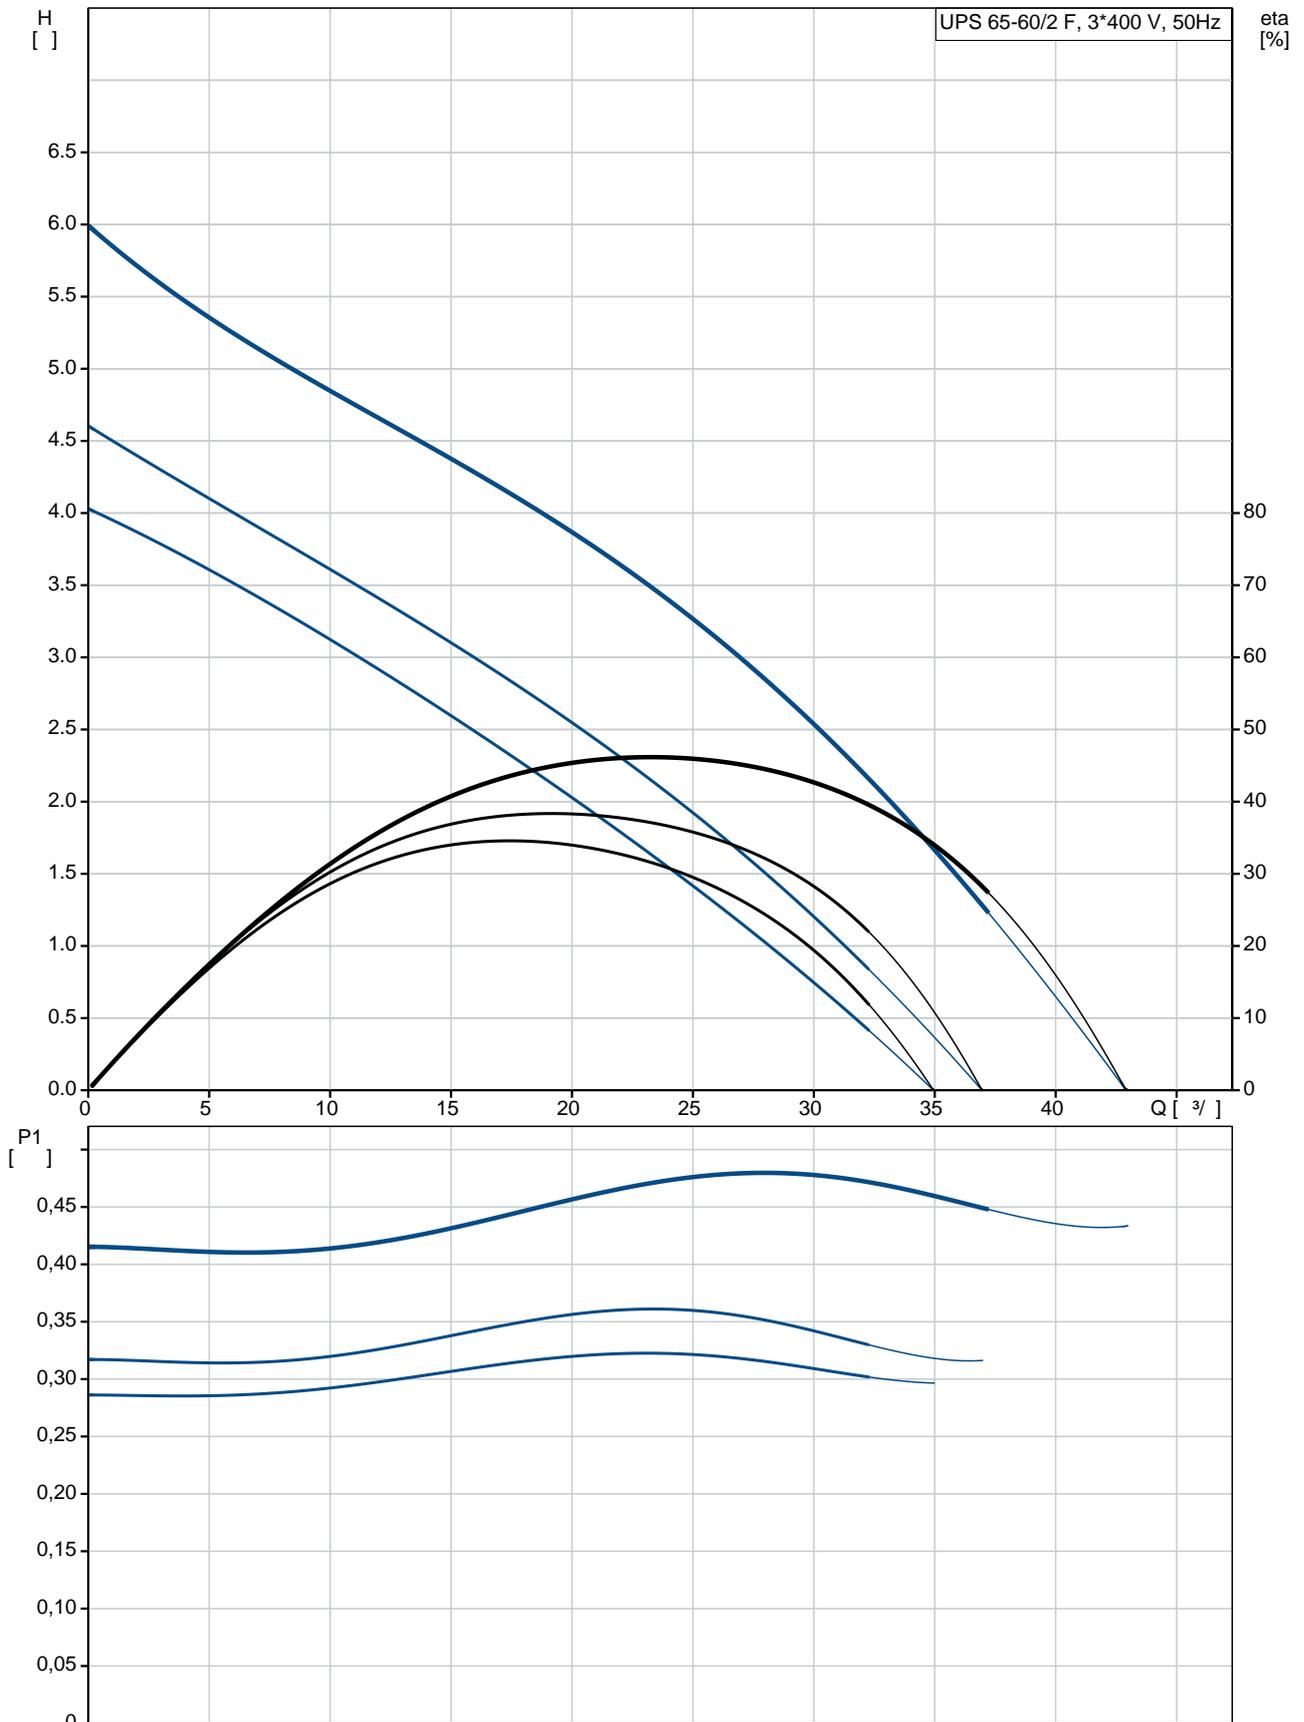

		UPS 65-60/2 F
		96402260
EAN		5708601058950
		3
		60
		AAA,EAC
		EN-JL1040
		ASTM 35 B - 40 B
		DIN W.-Nr. 1.4301
		AISI 304
		0 .. 40 °C
		10
		DIN
		DN 65
		PN 6 / PN 10
		340
		-10 .. 120 °C
		60 °C
		983.2 / 3
		1: 330
		2: 370
		490
		50 Hz
		3 x 400-415 V
	1:	0.56 A
	2:	0.64 A
	3:	1.05 A
Cos	1:	0,85
Cos	2:	0,83
Cos		0,67
		2
	(IEC 85):	F
Enclosure class (IEC 60529):		X4D
		CONTACT
		1.30H
		25.6
		26.1

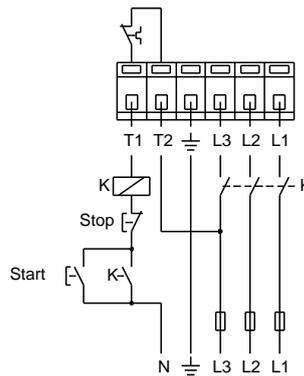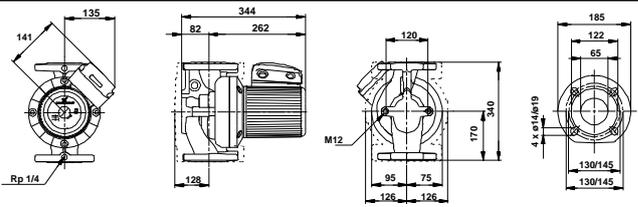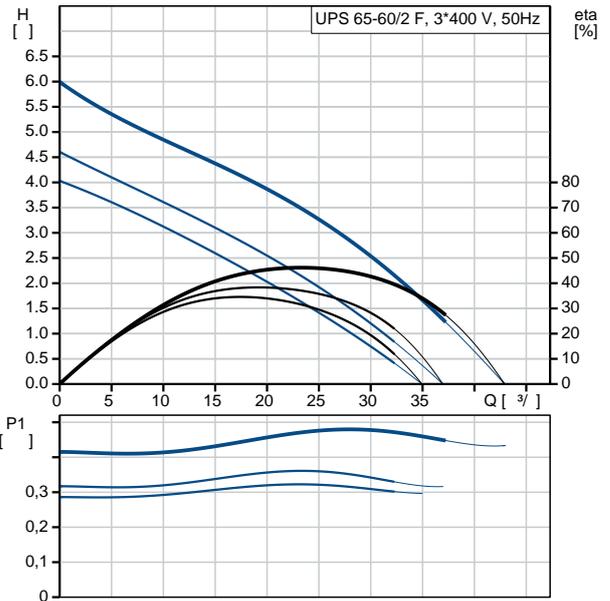

0.043³